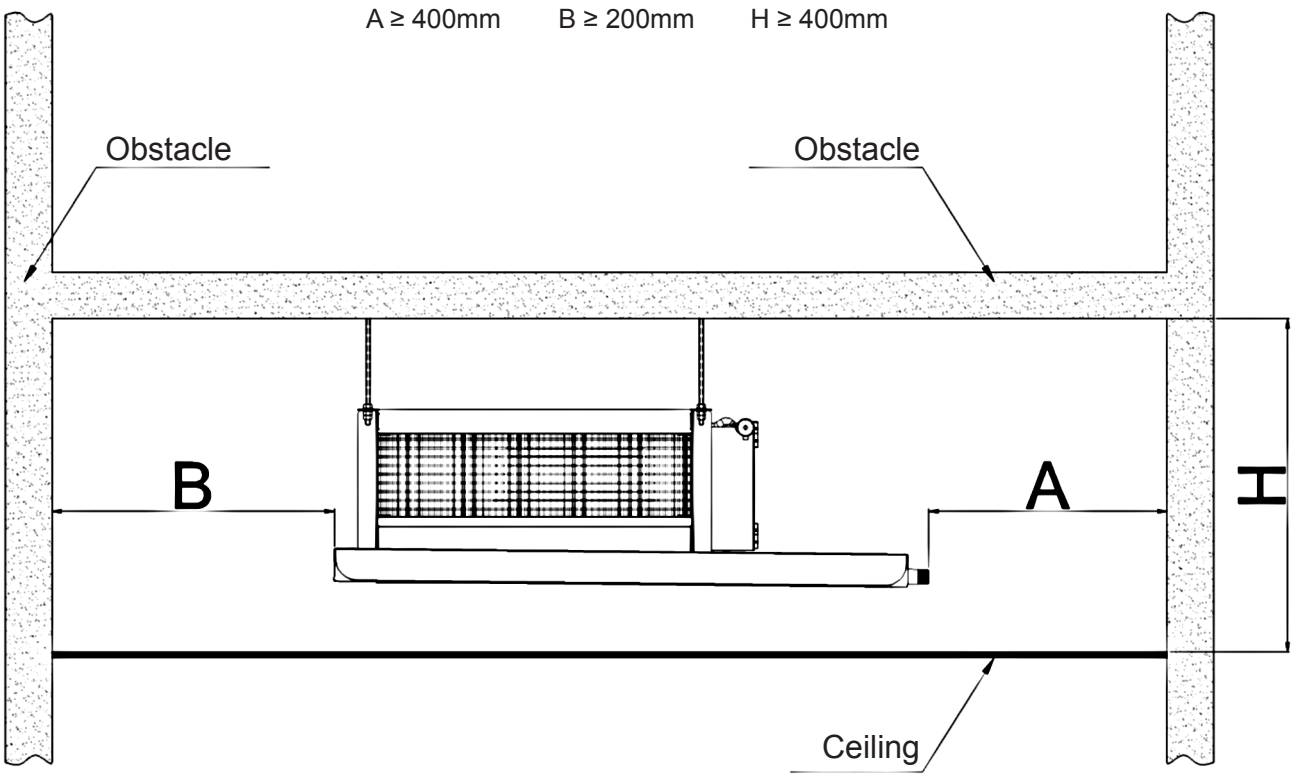

Figure 2

2 Unit Installation

- The unit is designed to be installed concealed ceiling and the like. Installation and maintenance should be performed by qualified persons who are familiar with local code and regulation, and experienced with this type of appliance.
- There are holes on top of the unit for hanging. Please refer to figure 1, figure 3, figure 4.
- Make sure that the top of the unit is level.
- Use proper insulation material only.
- Chilled water pipes and all parts on the pipes should be insulated.
- It is also necessary to insulate air ducts.
- Adhesive for insulation should able to work between -18˚C and 94˚C.
- During the installation make sure that the top side of the units is located horizontally. The drain pan is designed with a little gradient to facilitate drain.