


### Heat-up times

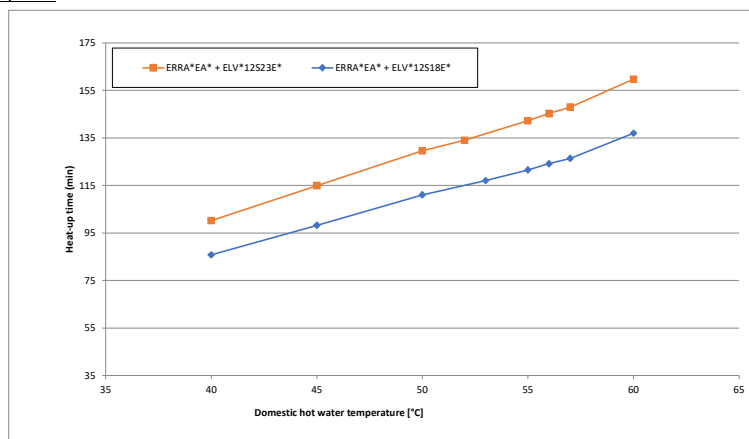


### Notes

- Time the indoor unit (**heat pump only operation**) requires to heat up the domestic hot water tank from 10°C to the indicated temperature. See the operation range for maximum domestic hot water tank temperature during heat pump only operation.

Model name	Heat-up time domestic hot water tank until
ERRA(08/10/12)EA* + ELV*12S18E*	-98 min.
ERRA(08/10/12)EA* + ELV*12S23E*	-115 min.

### Selection guide for the domestic hot water tank volume

Ve<sub>q</sub> 40°C is the amount of water with a temperature of 40°C that can be tapped when the domestic hot water tank is heated to a certain temperature, and the temperature of the cold inlet water is 10°C.

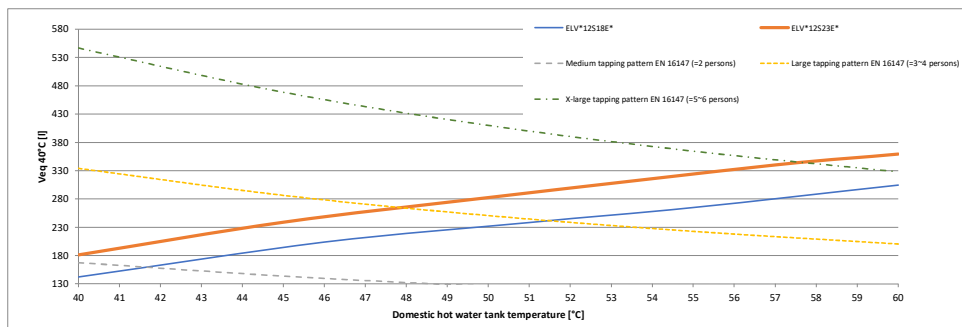

If a higher daily Ve<sub>q</sub> 40°C is required, then additional heat-up cycles are required within 24 hours. See the operation manual for more information.