


Sound Power overall ( dBA ): FWQ04AAF(N/T/V)5V1(-/-/R)

Whole casing


FWQ04AAF  
Whole Sound Power

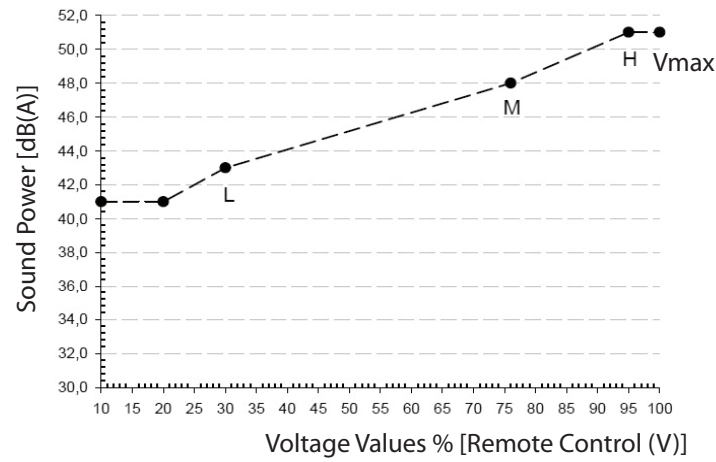

Fan Speed (0V-10V)	
Fan Speed (V)	Sound Power dB(A)
1.0 V (min)	41,0
2.0 V	41,0
3.0 V (L) @20 Pa	43,0
7.6 V (M) @50 Pa	48,0
9.5 V	51,0
10.0 V (H) (max) @60 Pa	51,0

Discharge


FWQ04AAF  
Discharge Sound Power

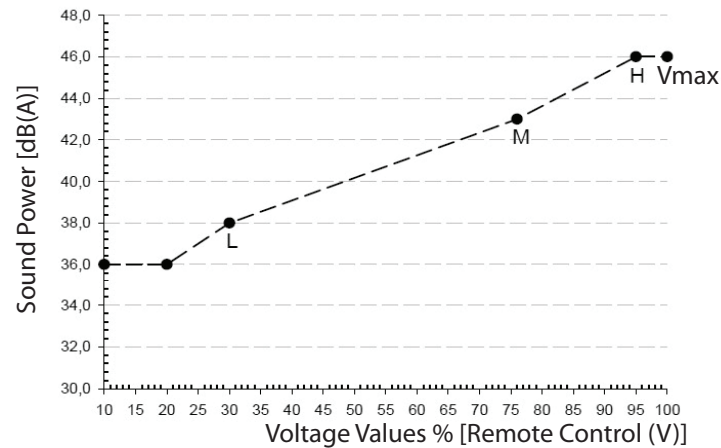

Fan Speed (0V-10V)	
Fan Speed (V)	Sound Power dB(A)
1.0 V (min)	36,0
2.0 V	36,0
3.0 V (L) @20 Pa	38,0
7.6 V (M) @50 Pa	43,0
9.5 V	46,0
10.0 V (H) (max) @60 Pa	46,0

Inlet + casing

FWQ04AAF  
Suction Sound Power

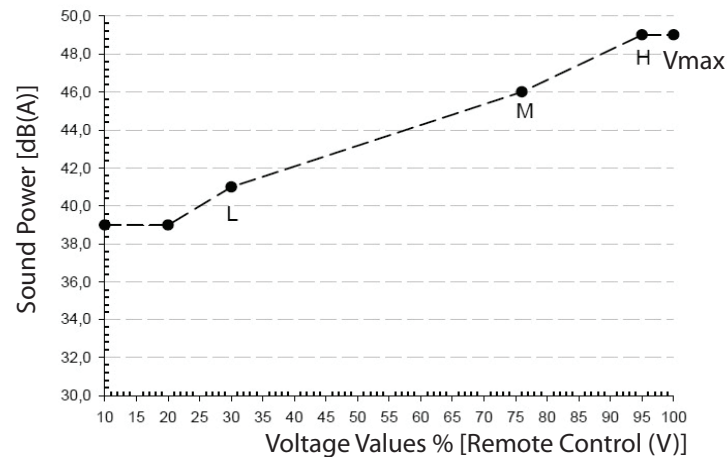

Fan Speed (0V-10V)	
Fan Speed (V)	Sound Power dB(A)
1.0 V (min)	39,0
2.0 V	39,0
3.0 V (L) @20 Pa	41,0
7.6 V (M) @50 Pa	46,0
9.5 V	49,0
10.0 V (H) (max) @60 Pa	49,0

NOTE

1. Test Condition: Dry Bulb Temperature: 20.0°C, Wet Bulb Temperature: 15.0°C
2. Voltage Values: 100% = 10.0V
3. Sound power measurement standard is EN 3741 (1999)