



Sound Power overall (dBA): FWQ09AAF(N/T/V)5V1(-/-/R)

Whole casing

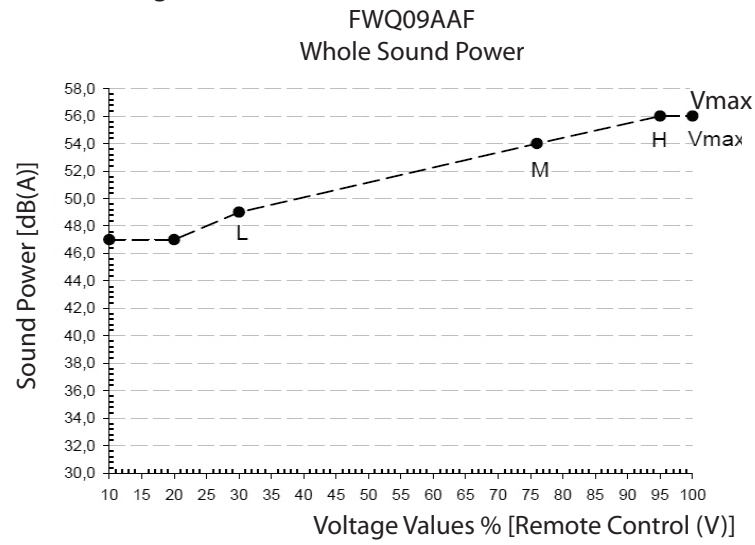


Fan Speed (0V-10V)	
Fan Speed (V)	Sound Power dB(A)
1.0 V (min)	47,0
2.0 V	47,0
3.0 V (L) @26 Pa	49,0
7.6 V (M) @50 Pa	54,0
9.5 V	56,0
10.0 V (H) (max) @60 Pa	56,0

Discharge

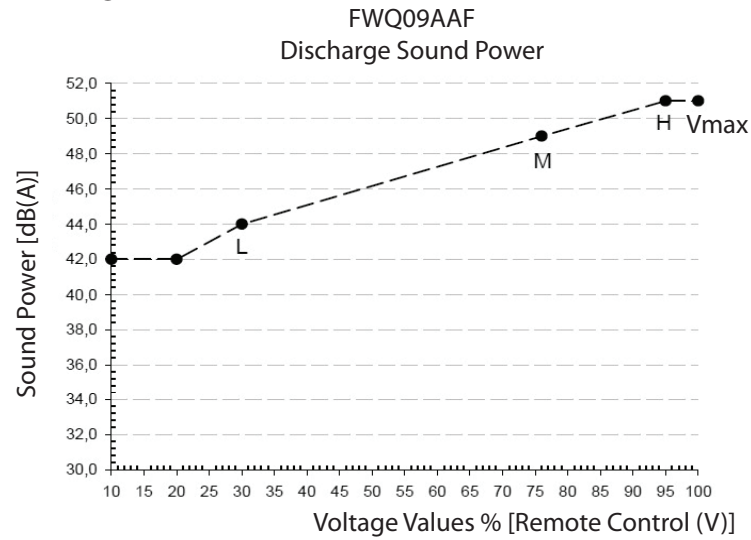

Fan Speed (0V-10V)	
Fan Speed (V)	Sound Power dB(A)
1.0 V (min)	42,0
2.0 V	42,0
3.0 V (L) @26 Pa	44,0
7.6 V (M) @50 Pa	49,0
9.5 V	51,0
10.0 V (H) (max) @60 Pa	51,0

Inlet + casing

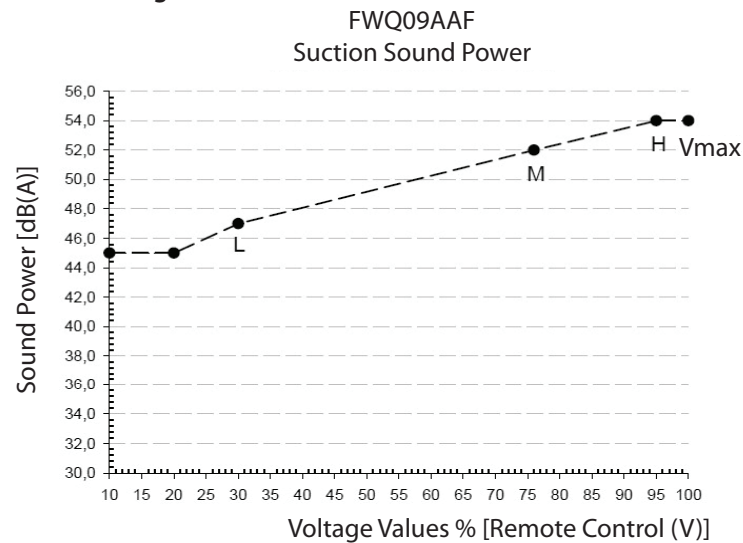

Fan Speed (0V-10V)	
Fan Speed (V)	Sound Power dB(A)
1.0 V (min)	45,0
2.0 V	45,0
3.0 V (L) @26 Pa	47,0
7.6 V (M) @50 Pa	52,0
9.5 V	54,0
10.0 V (H) (max) @60 Pa	54,0

NOTE

1. Test Condition: Dry Bulb Temperature: 20.0°C, Wet Bulb Temperature: 15.0°C
2. Voltage Values: 100% = 10.0V
3. Sound power measurement standard is EN 3741 (1999)