



Sound Power overall ( dBA ): FWQ14AAT(N/T/V)5V1(-/-R)

Whole casing

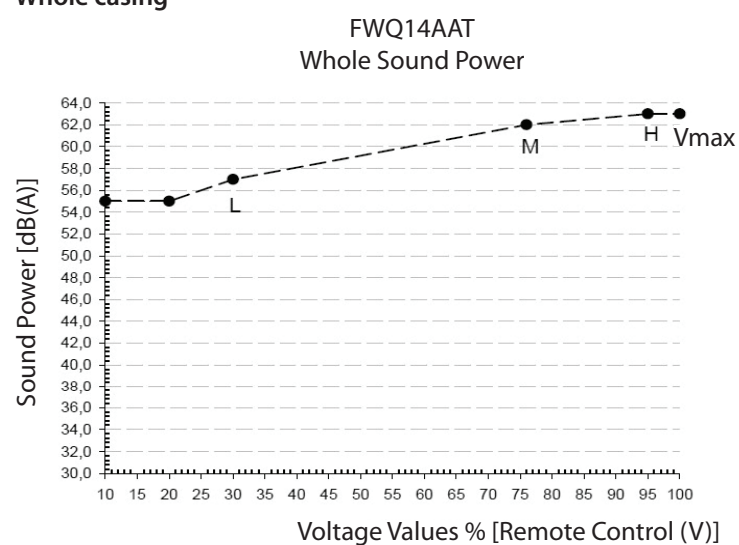


Fan Speed (0V-10V)	
Fan Speed (V)	Sound Power dB(A)
1.0 V (min)	55,0
2.0 V	55,0
3.0 V (L) @26 Pa	57,0
7.6 V (M) @50 Pa	62,0
9.5 V	63,0
10.0 V (H) (max) @60 Pa	63,0

Discharge

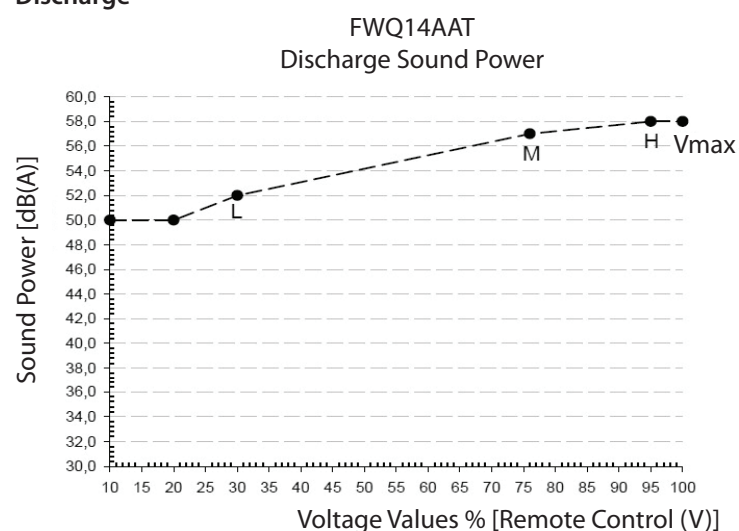

Fan Speed (0V-10V)	
Fan Speed (V)	Sound Power dB(A)
1.0 V (min)	50,0
2.0 V	50,0
3.0 V (L) @26 Pa	52,0
7.6 V (M) @50 Pa	57,0
9.5 V	58,0
10.0 V (H) (max) @60 Pa	58,0

Inlet + casing

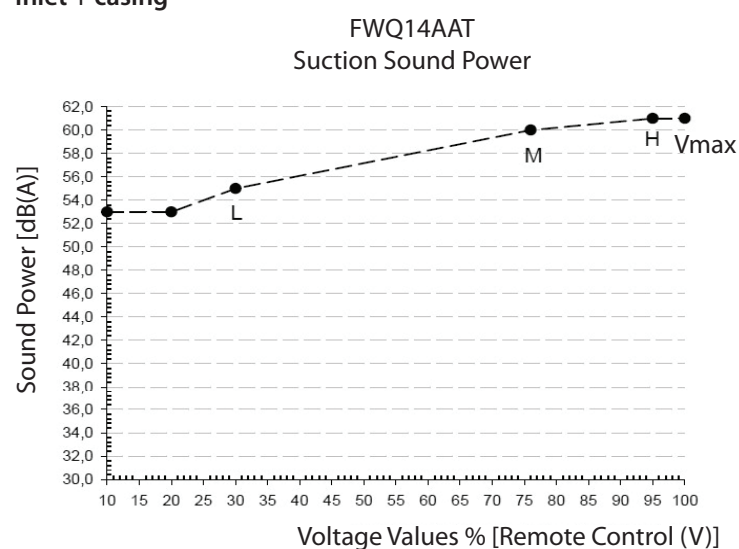

Fan Speed (0V-10V)	
Fan Speed (V)	Sound Power dB(A)
1.0 V (min)	53,0
2.0 V	53,0
3.0 V (L) @26 Pa	55,0
7.6 V (M) @50 Pa	60,0
9.5 V	61,0
10.0 V (H) (max) @60 Pa	61,0

NOTE

1. Test Condition: Dry Bulb Temperature: 20.0°C, Wet Bulb Temperature: 15.0°C
2. Voltage Values: 100% = 10.0V
3. Sound power measurement standard is EN 3741 (1999)