


FWQ20AF
FWQ20AFR


Sound Power overall (dBA): FWQ20AAF(N/T/V)5V1-(-/R)

Whole casing

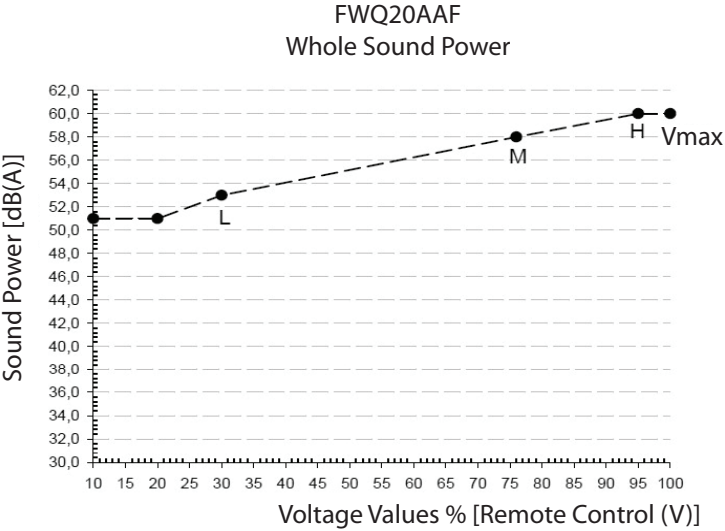


Fan Speed (0V-10V)	
Fan Speed (V)	Sound Power dB(A)
1.0 V (min)	51,0
2.0 V	51,0
3.0 V (L) @26 Pa	53,0
7.6 V (M) @50 Pa	58,0
9.5 V	60,0
10.0 V (H) (max) @60 Pa	60,0

Discharge

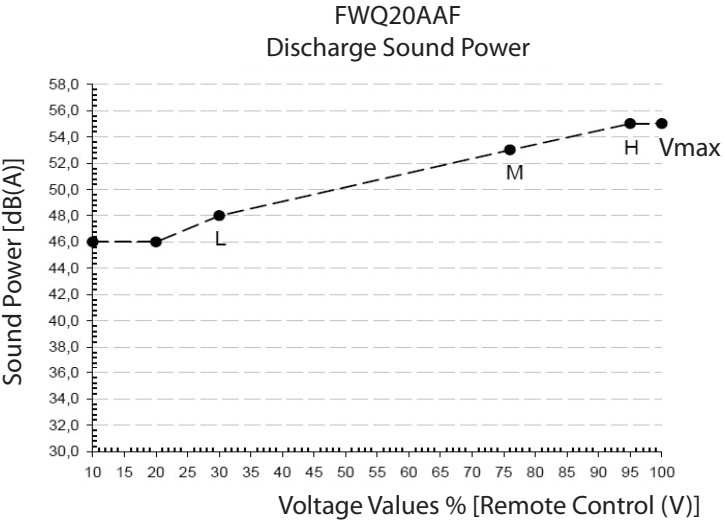

Fan Speed (0V-10V)	
Fan Speed (V)	Sound Power dB(A)
1.0 V (min)	46,0
2.0 V	46,0
3.0 V (L) @26 Pa	48,0
7.6 V (M) @50 Pa	53,0
9.5 V	55,0
10.0 V (H) (max) @60 Pa	55,0

Inlet + casing

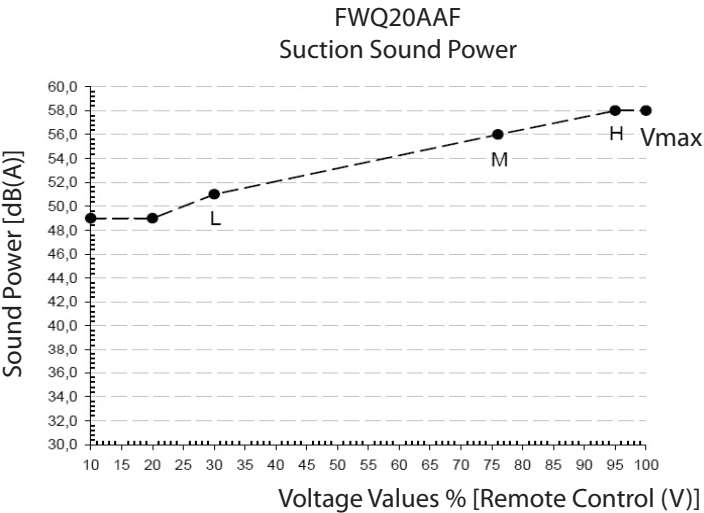

Fan Speed (0V-10V)	
Fan Speed (V)	Sound Power dB(A)
1.0 V (min)	49,0
2.0 V	49,0
3.0 V (L) @26 Pa	51,0
7.6 V (M) @50 Pa	56,0
9.5 V	58,0
10.0 V (H) (max) @60 Pa	58,0

- NOTE**
- 1. Test Condition: Dry Bulb Temperature: 20.0°C, Wet Bulb Temperature: 15.0°C
 - 2. Voltage Values: 100% = 10.0V
 - 3. Sound power measurement standard is EN 3741 (1999)