


Sound Power overall (dBA): FWQ20AAT(N/T/V)5V1(-/-R)

Whole casing


FWQ20AAT
Whole Sound Power

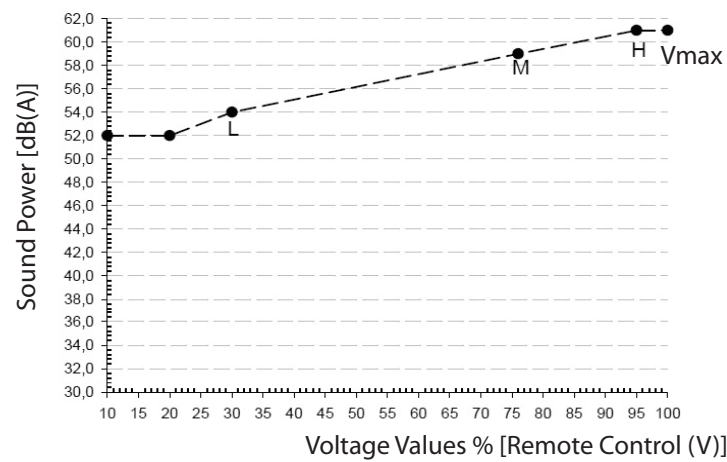

Fan Speed (0V-10V)	
Fan Speed (V)	Sound Power dB(A)
1.0 V (min)	52,0
2.0 V	52,0
3.0 V (L) @26 Pa	54,0
7.6 V (M) @50 Pa	59,0
9.5 V	61,0
10.0 V (H) (max) @60 Pa	61,0

Discharge


FWQ20AAT
Discharge Sound Power

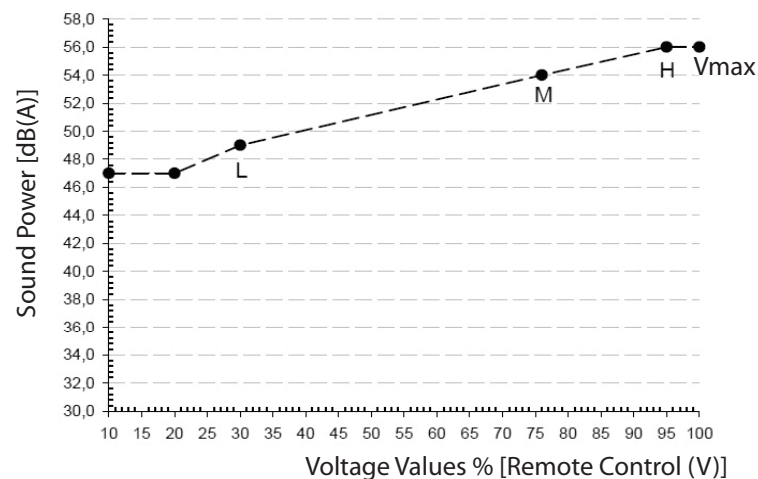

Fan Speed (0V-10V)	
Fan Speed (V)	Sound Power dB(A)
1.0 V (min)	47,0
2.0 V	47,0
3.0 V (L) @26 Pa	49,0
7.6 V (M) @50 Pa	54,0
9.5 V	56,0
10.0 V (H) (max) @60 Pa	56,0

Inlet + casing

FWQ20AAT
Suction Sound Power

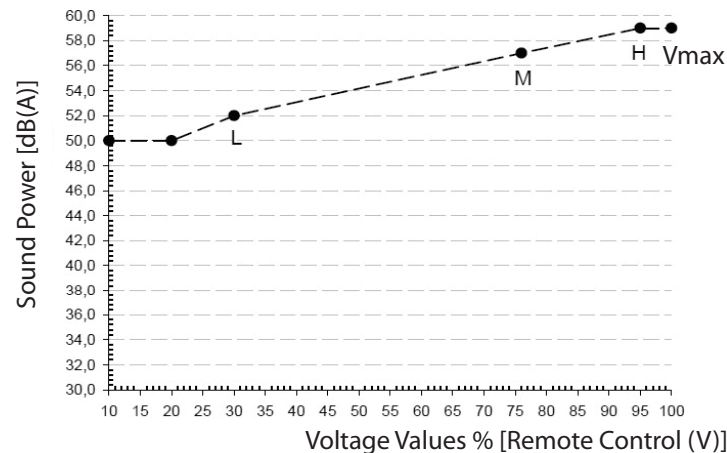

Fan Speed (0V-10V)	
Fan Speed (V)	Sound Power dB(A)
1.0 V (min)	50,0
2.0 V	50,0
3.0 V (L) @26 Pa	52,0
7.6 V (M) @50 Pa	57,0
9.5 V	59,0
10.0 V (H) (max) @60 Pa	59,0

NOTE

1. Test Condition: Dry Bulb Temperature: 20.0°C, Wet Bulb Temperature: 15.0°C
2. Voltage Values: 100% = 10.0V
3. Sound power measurement standard is EN 3741 (1999)