



Potencia sonora total (dB(A): FWQ14AAF(N/T/V)5V1-(-/R)

Carcasa integral

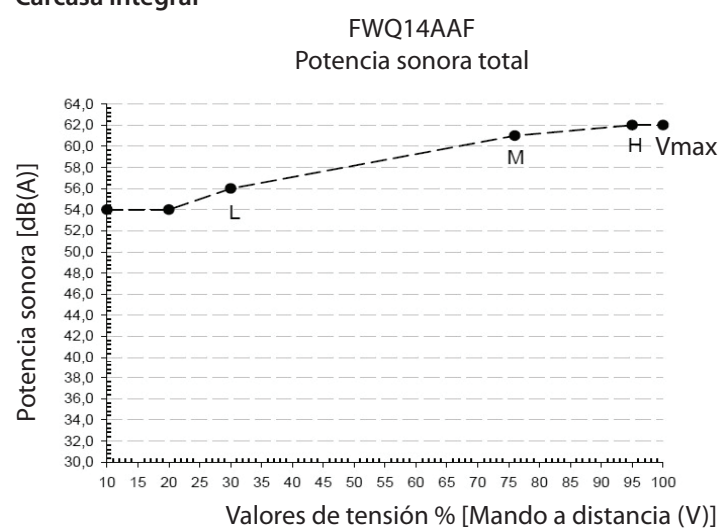


Velocidad del ventilador (0 V-10 V)	
Velocidad del ventilador (V)	Potencia sonora dB(A)
1,0 V (mín.)	54,0
2,0 V	54,0
3,0 V (L) @26 Pa	56,0
7,6 V (M) @50 Pa	61,0
9,5 V	62,0
10,0 V (H) (máx.) @60 Pa	62,0

Descarga

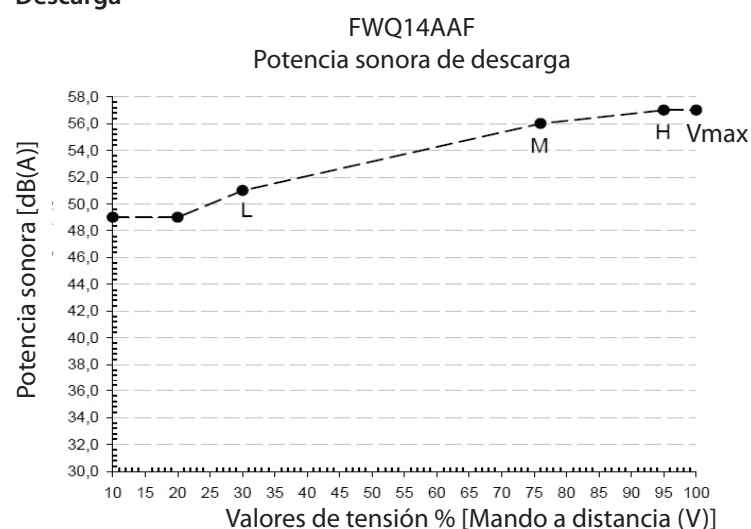

Velocidad del ventilador (0 V-10 V)	
Velocidad del ventilador (V)	Potencia sonora dB(A)
1,0 V (mín.)	49,0
2,0 V	49,0
3,0 V (L) @26 Pa	51,0
7,6 V (M) @50 Pa	56,0
9,5 V	57,0
10,0 V (H) (máx.) @60 Pa	57,0

Admisión + carcasa

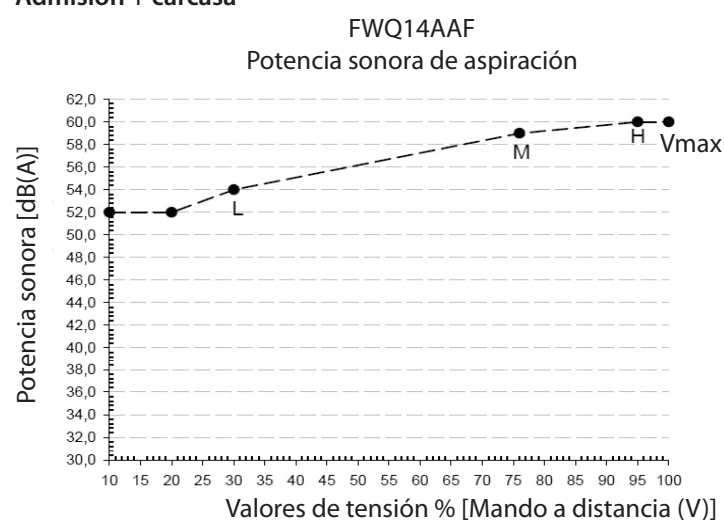

Velocidad del ventilador (0 V-10 V)	
Velocidad del ventilador (V)	Potencia sonora dB(A)
1,0 V (mín.)	52,0
2,0 V	52,0
3,0 V (L) @26 Pa	54,0
7,6 V (M) @50 Pa	59,0
9,5 V	60,0
10,0 V (H) (máx.) @60 Pa	60,0

NOTA

1. Condición de prueba: Temperatura de bulbo seco: 20,0 °C, temperatura de bulbo húmedo: 15,0 °C
2. Valores de tensión: 100% = 10,0 V
3. La norma de medición de la potencia acústica es EN 3741 (1999)