


EAVH-D6V7
 EAVH-D9W7
 EAVH-UD6V7
 EAVX-D6V7
 EAVX-D9W7
 EAVZ-D6V7

Heat-up times

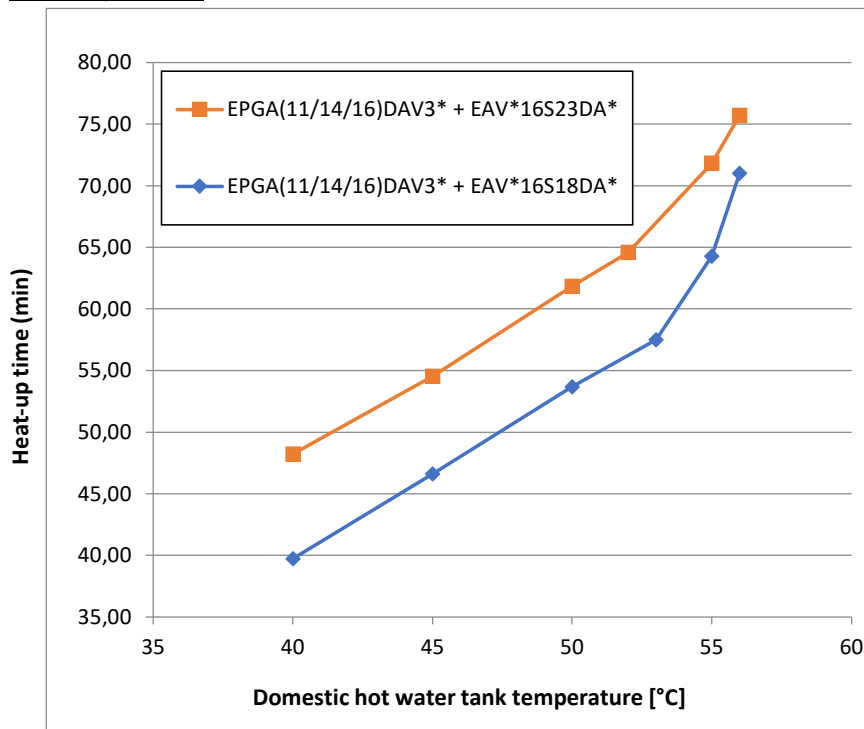

Model name	Heat-up time domestic hot water tank until 45°C
EPGA(11/14/16)DAV3* + EAV*16S18DA*	·46· min.
EPGA(11/14/16)DAV3* + EAV*16S23DA*	·55· min.

Notes


1. Time the indoor unit (**heat pump only operation**) requires to heat up the domestic hot water tank from 10°C to the indicated temperature.

See the operation range for maximum domestic hot water tank temperature during heat pump only operation.

Selection guide for the domestic hot water tank volume

(1)

Ve_q 40°C = the amount of water with a temperature of 40°C that can be tapped when the domestic hot water tank is heated to a certain temperature, and the temperature of the cold inlet water is 10°C.

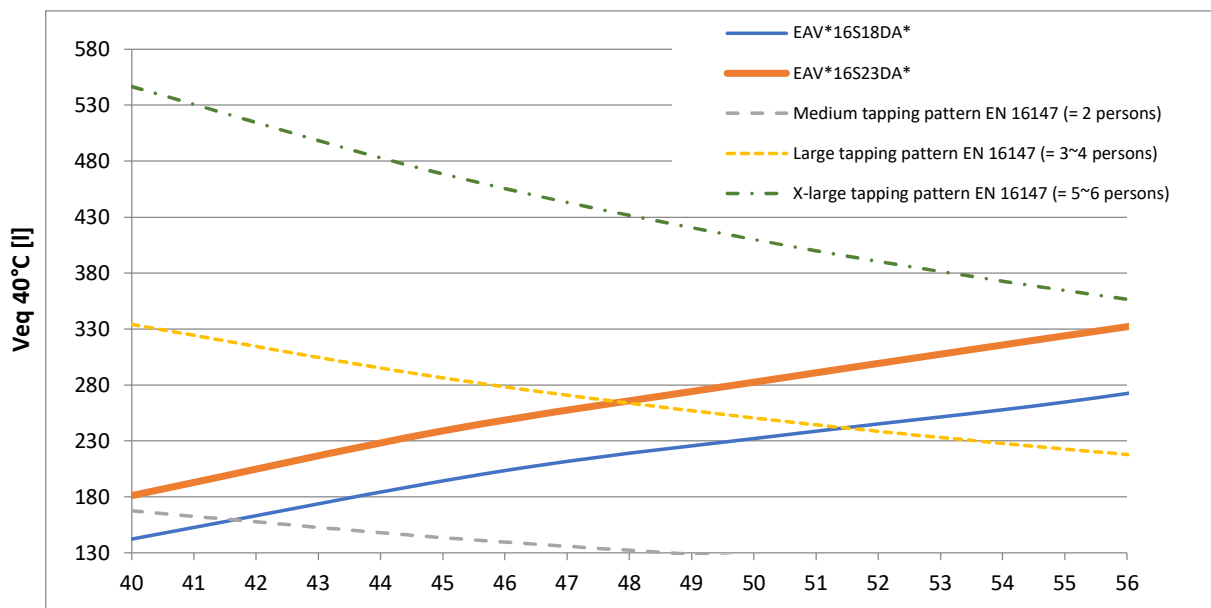

If a higher daily Ve_q 40°C is required, then additional heat-up cycles are required within 24 hours. See the operation manual for more information.

Notes

- (1) According to EN16147.