
EHBH-E6V / EHBH-E9W / EHBX-E6V / EHBX-E9W

EHSH-E / EHSHB-E / EHSX-E / EHSXB-E

EHVH-E6V / EHVH-E6VG / EHVH-E9W / EHVX-E3V / EHVX-E6V / EHVX-E9W / EHVZ-E6V / EHVZ-E9W

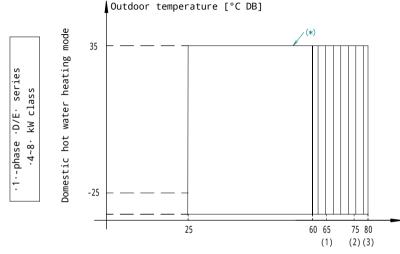

Domestic hot water tank temperature [°C]

Legend

■ Booster heater only operation (if a booster heater is part of the system)

- (1) ·EHVH*S*CBV· indoor units only
- (2) Combination of ·EKHWS(P)1*DA*· and ·EHB*D/E(A/F)V*· indoor units
- (3) Combination of \cdot EKHWS(P)(2/3)*DA*· and \cdot EHB*D/E(A/F)V*· indoor units

(*) System operation: the system consists of an outdoor unit and indoor unit, and depending on the system, a booster heater and/or a backup heater.

Remark

In restricted power supply mode (\cdot EKHW* \cdot only), the outdoor unit, booster heater and backup heater can only operate separately.

If the outdoor temperature $\cdot < -20^{\circ}$ C, then outdoor unit operation is possible, but with a possible capacity reduction.

If the outdoor temperature < -25°C, the outdoor unit will stop.

Indoor unit and backup heater operation will continue.