

EHBH-CBV

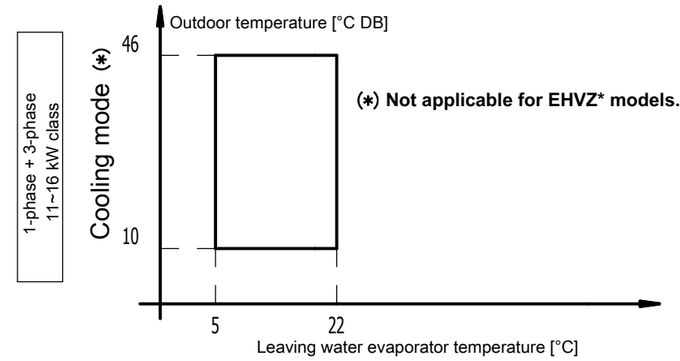



(*) Not applicable for EHVZ* models.

Indoor

AA series
AB series
BA series
BB series
CA series
CB series
EHVZ* (Integrated Bizone)

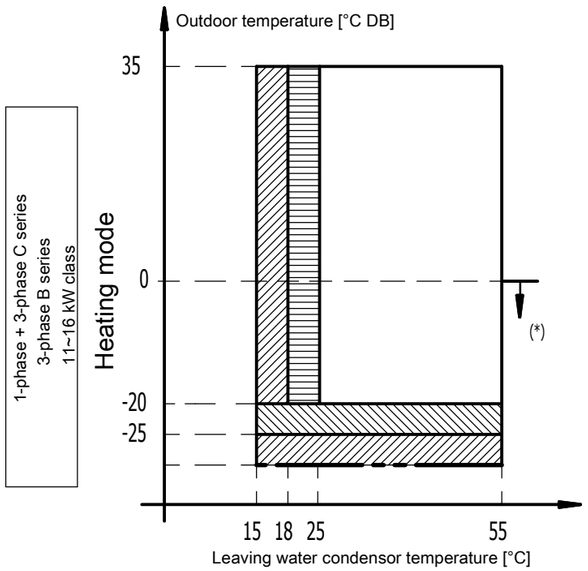


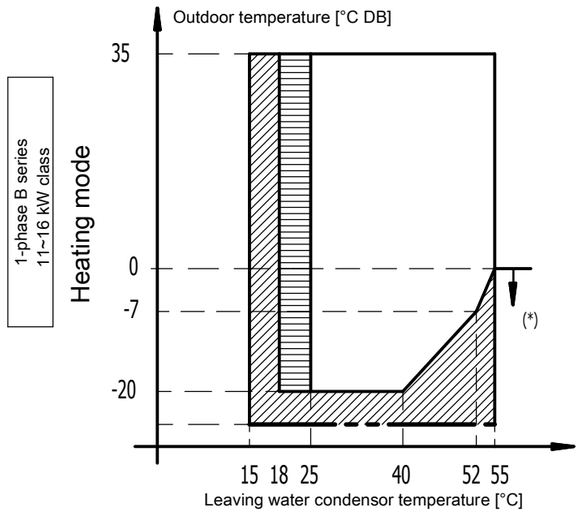

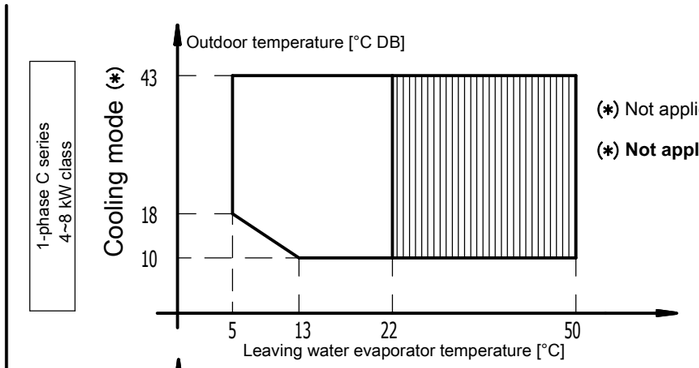

(*) Not applicable for C*VF models.

(*) Not applicable for EHVZ* models.

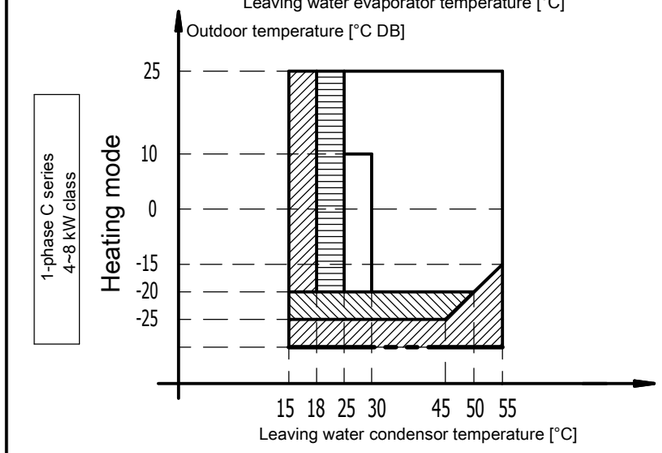

Indoor

CA series
CB series
C*VF series
EHVZ* (Integrated Bizone)

Legend

Backup heater only operation
No outdoor unit operation

Outdoor unit operation if setpoint ≥ 25°C

Operation of outdoor unit possible, but with possible capacity reduction.
If the outdoor temperature < –25°C, the outdoor unit will stop.
Indoor unit and backup heater operation will continue.

Pull-down area

Remark

In restricted power supply mode, the outdoor unit, booster heater and backup heater can only operate separately.

(*) *RLQ units include special equipment (insulation, heater sheet, ...) to ensure proper operation in areas with low ambient temperatures and high humidity conditions.
In such conditions, the *RHQ models may experience problems with severe ice buildup on the air-cooled coil.
If such conditions are expected, the *RLQ must be installed instead.
These models contain countermeasures (insulation, heater sheet, ...) to prevent freeze-up.