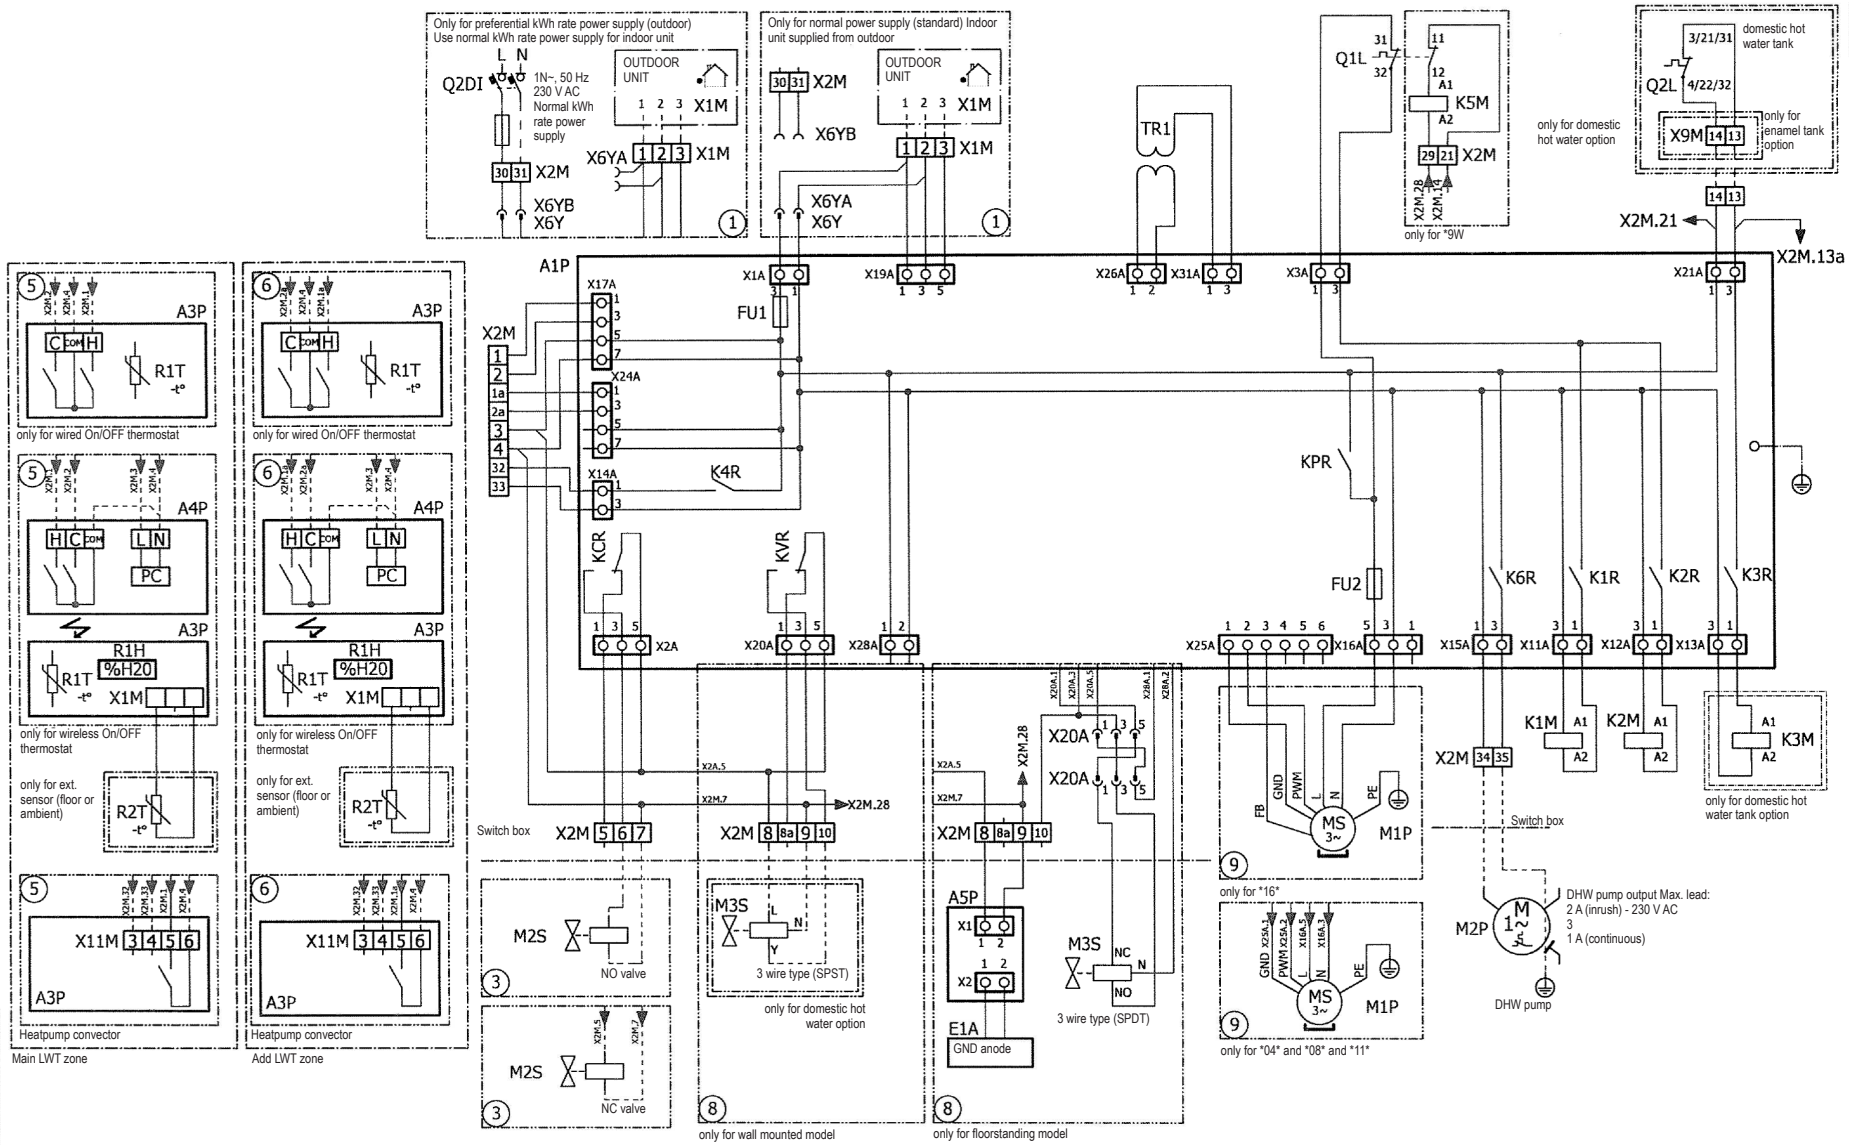
Only for preferential kWh rate power supply (outdoor)
Use normal kWh rate power supply for indoor unit
Only for normal power supply (standard) Indoor unit supplied from outdoor
OUTDOOR UNIT
Q2DI
1N~, 50 Hz 230 V AC Normal kWh rate power supply
X1M
X2M
X6YA
X6YB
X6Y
TR1
Q1L
K5M
only for *9W
only for domestic hot water option
domestic hot water tank
Q2L
only for enamel tank option
X2M.21
X2M.13a
A1P
FU1
K4R
KPR
FU2
K6R
K1R
K2R
K3R
K1M
K2M
K3M
only for domestic hot water tank option
A3P
R1T
only for wired On/OFF thermostat
A4P
R1H
%H2O
only for wireless On/OFF thermostat
R2T
only for ext. sensor (floor or ambient)
X11M
Heatpump convector
Main LWT zone
Add LWT zone
Switch box
M2S
NO valve
NC valve
M3S
3 wire type (SPST)
only for domestic hot water option
3 wire type (SPDT)
A5P
E1A
GND anode
only for wall mounted model
only for floorstanding model
M1P
only for *16*
only for *04* and *08* and *11*
M2P
DHW pump output Max. lead:
2 A (inrush) - 230 V AC
3
1 A (continuous)
DHW pump