





EKHBRD-ACV1

Space heating mode

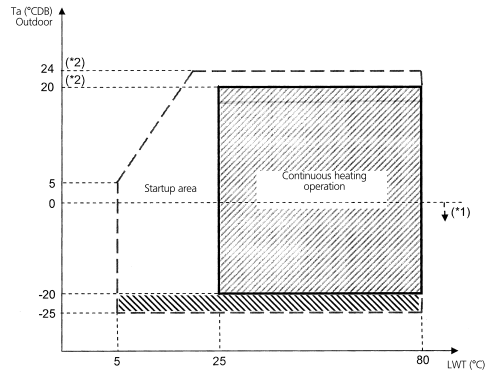




-  Continuous heating operation
-  Startup area
-  operation possible, but no guarantee of capacity

(*1) ERQ*(V1/Y1) units include special equipment (insulation, heater sheet, ...) to ensure good operation in areas where low ambient temperature can occur together with high humidity conditions. In such conditions the ERQ*(V1/Y1) models may experience problems with severe ice build up on the aircooled coil. In case such conditions are expected the ERQ*(V1/Y1) must be installed instead. These models contain countermeasures to prevent freeze up.

(*2) Can be adjusted by field setting

Domestic hot water mode

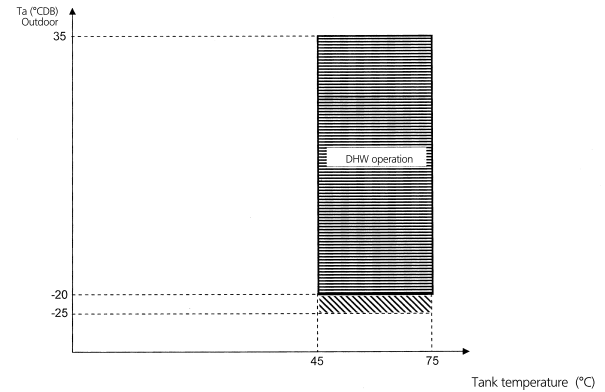

-  Domestic hot water operation
-  operation possible, but no guarantee of capacity

Remark:
Operation range is only valid for EKHBRD*AC* + ER(R/S)Q*.
For EKHBRD*AC* + EMRQ* see operation range EMRQ*.