
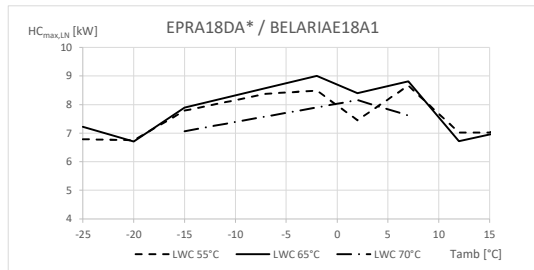
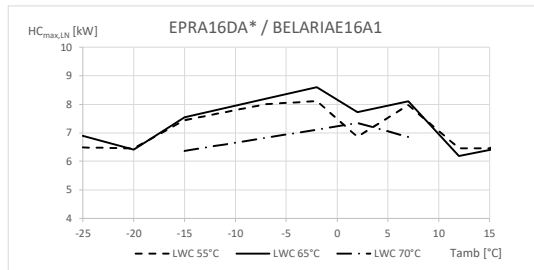


# EPRA14-18DV7 / EPRA14-18DW7




## Maximum heating capacity - integrated value

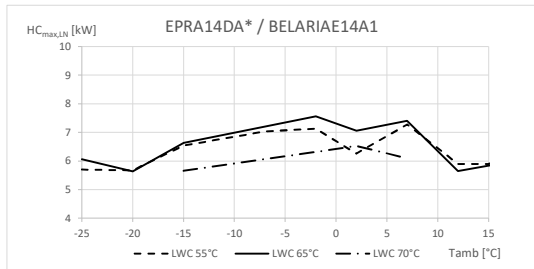

### Symbols

$HC_{max,IN}$	Heating capacity for maximum load, measured according to EN 14511
LWC	Leaving water condenser temperature [°C]
Tamb	Ambient temperature [°C DB]

## Maximum heating capacity - peak values

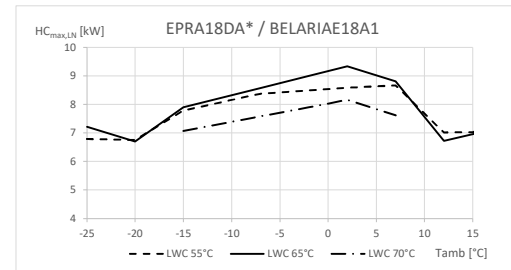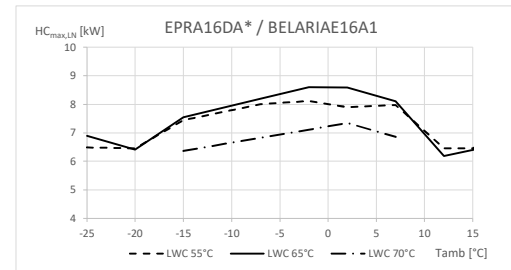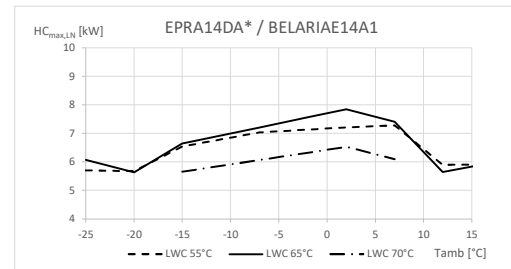

### Conditions

#### Heating capacity

Capacity according to standard EN 14511 and valid for heated water range  $\Delta T = 3^{\circ}\text{--}8^{\circ}\text{C}$ .

#### Notes

The capacity and power input is valid for -V3- models at -230-V and for for -W1- models at -400-V. Full load (maximum fan rps and maximum compressor rps for the dedicated low noise mode) Low noise level -2-