


Heat-up times

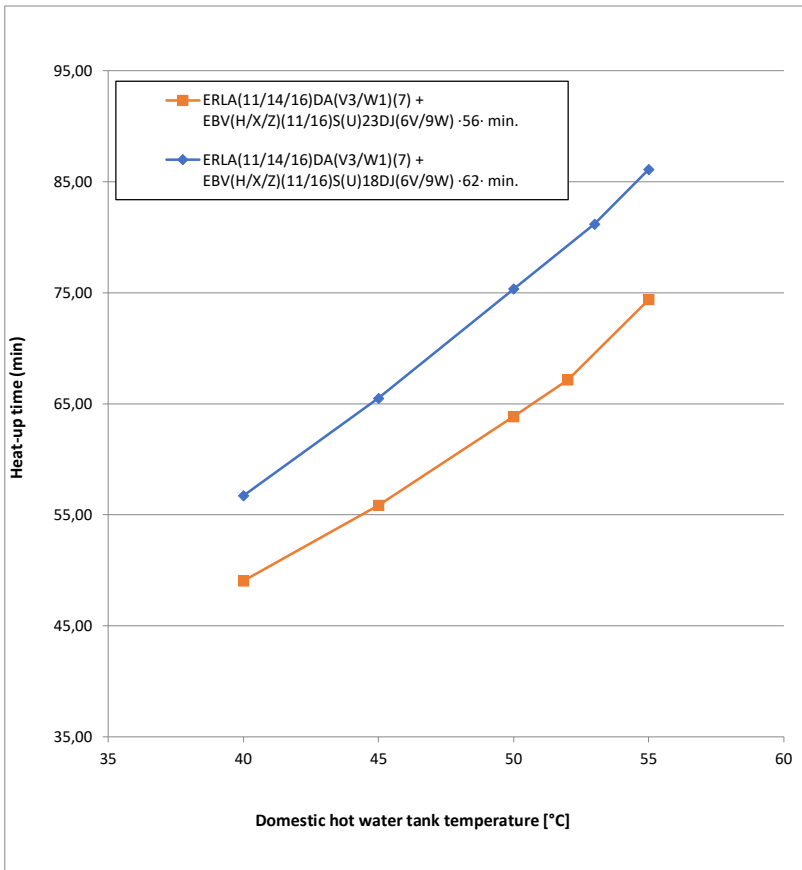

Model name	Heat-up time domestic hot water tank until 45°C
ERLA(11/14/16)DA(V3/W1)(7) + EBV(H/X/Z)(11/16)S(U)18DJ(6V/9W)	· 62 min.
ERLA(11/14/16)DA(V3/W1)(7) + EBV(H/X/Z)(11/16)S(U)23DJ(6V/9W)	· 56 min.

Notes


1. Time the indoor unit (**heat pump only operation**) requires to heat up the domestic hot water tank from 10°C to the indicated temperature.

See the operation range for maximum domestic hot water tank temperature during heat pump only operation.

Selection guide for the domestic hot water tank volume

(1)

Ve_q 40°C = the amount of water with a temperature of 40°C that can be tapped when the domestic hot water tank is heated to a certain temperature, and the temperature of the cold inlet water is 10°C.

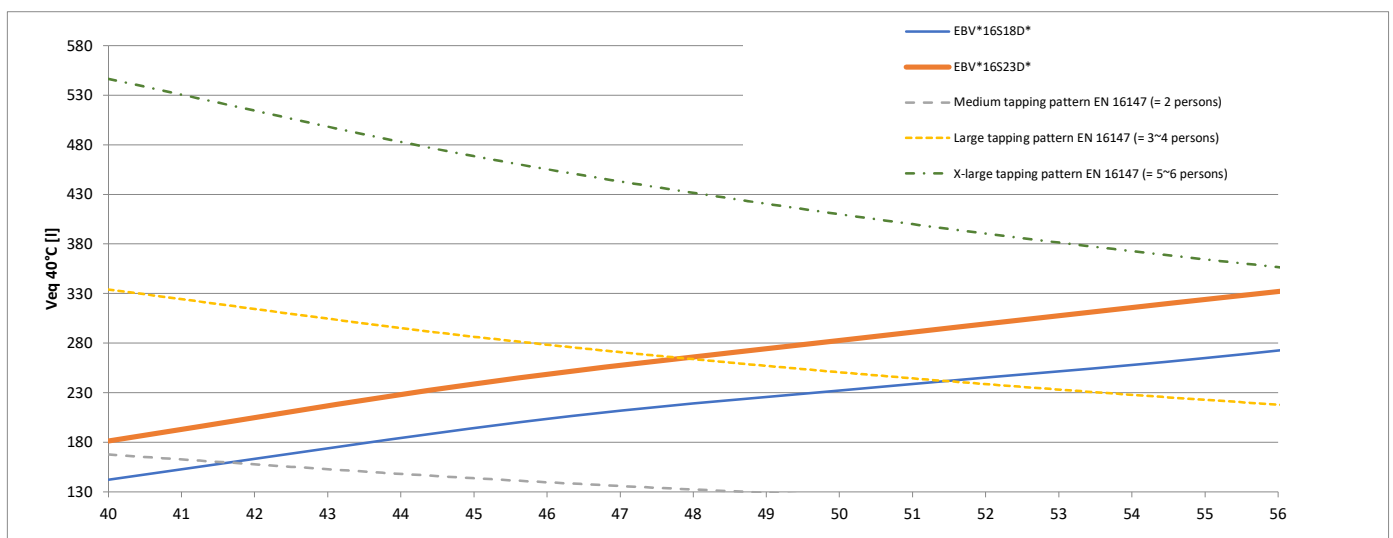

If a higher daily Ve_q 40°C is required, then additional heat-up cycles are required within 24 hours.
See the operation manual for more information.

According to EN16147.