

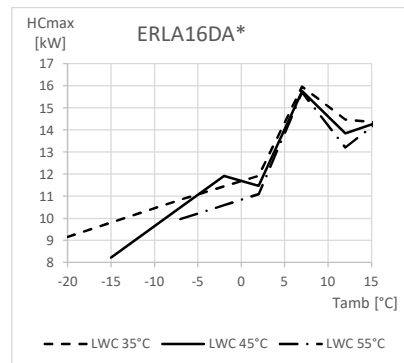
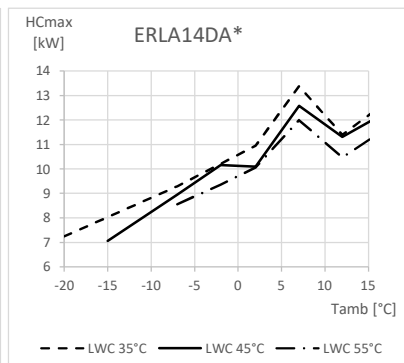
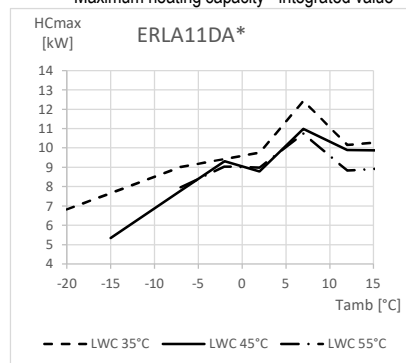
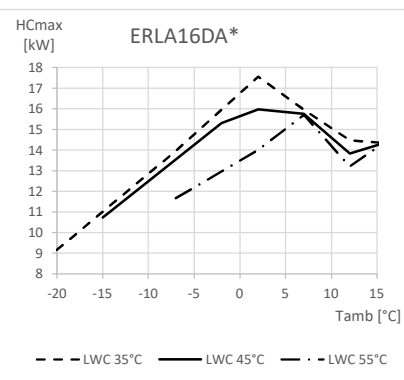


ERLA11-14DV3 / ERLA11-14DW1 / ERLA-DV37 / ERLA-DW17

Maximum heating capacity - integrated value

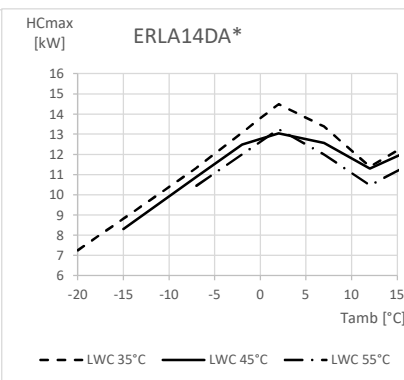

Maximum heating capacity - peak values

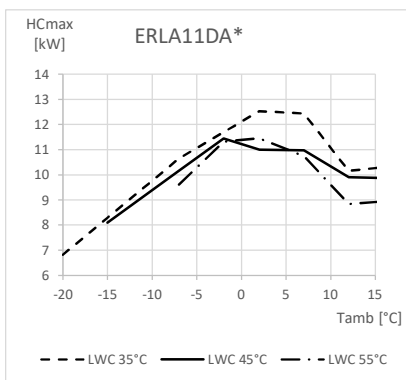

Symbols

HC _{max}	Heating capacity for maximum load, measured according to EN 14511
LWC	Leaving water condensor temperature [°C]
Tamb	Ambient temperature [°C DB]

Conditions

Heating capacity

Capacity according to standard EN 14511 and valid for heated water range $\Delta T = 3 \sim 8^\circ\text{C}$.

Notes

The capacity and power input is valid for ·V3· models at ·230-V and for for ·W1· models at ·400-V.
The capacity and the power input are at maximum operation.