

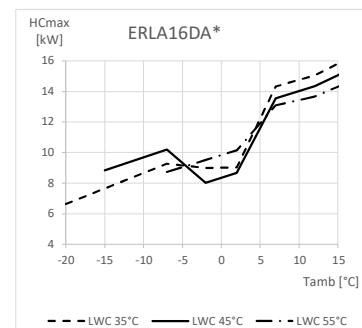

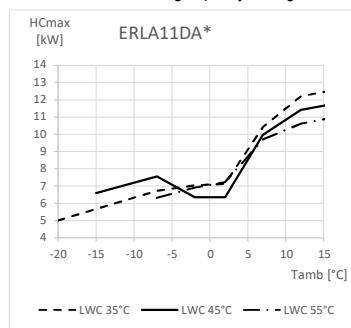
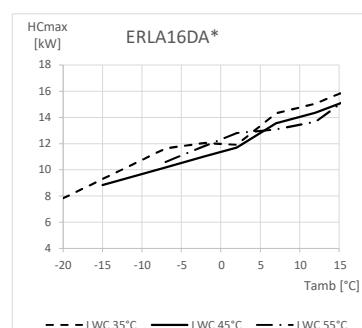


ERLA11-14DV3 / ERLA11-14DW1 / ERLA-DV37 / ERLA-DW17

Maximum heating capacity - integrated value



Maximum heating capacity - peak values

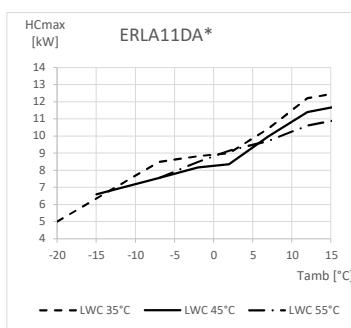

Symbols

HC_{\max} Heating capacity for maximum load, measured according to EN 14511

LWC Leaving water condenser temperature [°C]

Tamb Ambient temperature [°C DB]

Conditions

Heating capacity

Capacity according to standard EN 14511 and valid for heated water range $\Delta T = 3 \sim 8^{\circ}\text{C}$.

Notes

The capacity and power input is valid for -V3- models at -230-V and for for -W1- models at -400-V.

The capacity and the power input are at maximum operation.

4D137449