
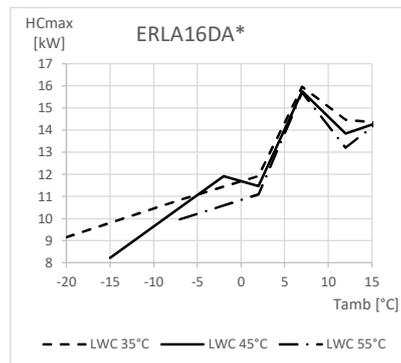
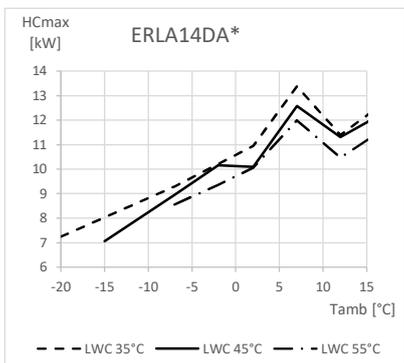





ERLA11-16DV3

ERLA11-16DW1

Maximum heating capacity - integrated value

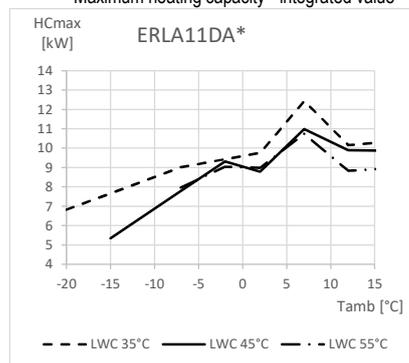

Maximum heating capacity - peak values

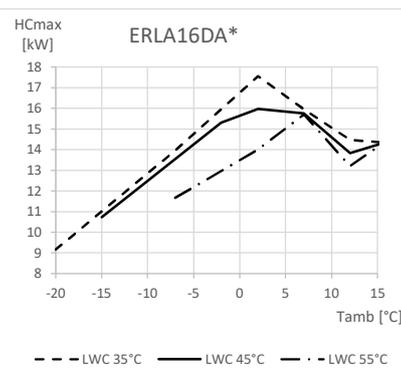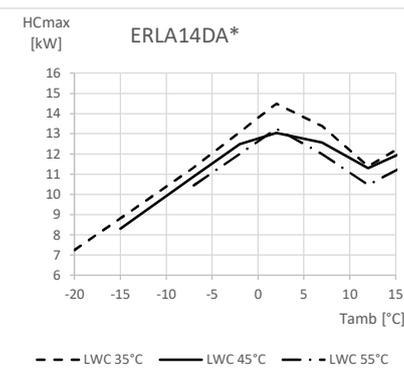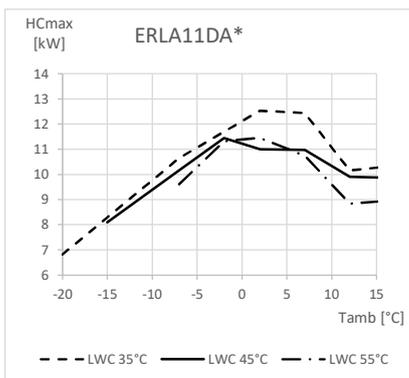

Symbols

HC_{max} Heating capacity for maximum load, measured according to EN 14511

LWC Leaving water condensor temperature [°C]

Tamb Ambient temperature [°C DB]

Conditions

Heating capacity

Capacity according to standard EN 14511 and valid for heated water range $\Delta T = 3 \sim 8^\circ\text{C}$.

Notes

The capacity and power input is valid for ·V3· models at ·230-V and for for ·W1· models at ·400-V.

The capacity and the power input are at maximum operation.