




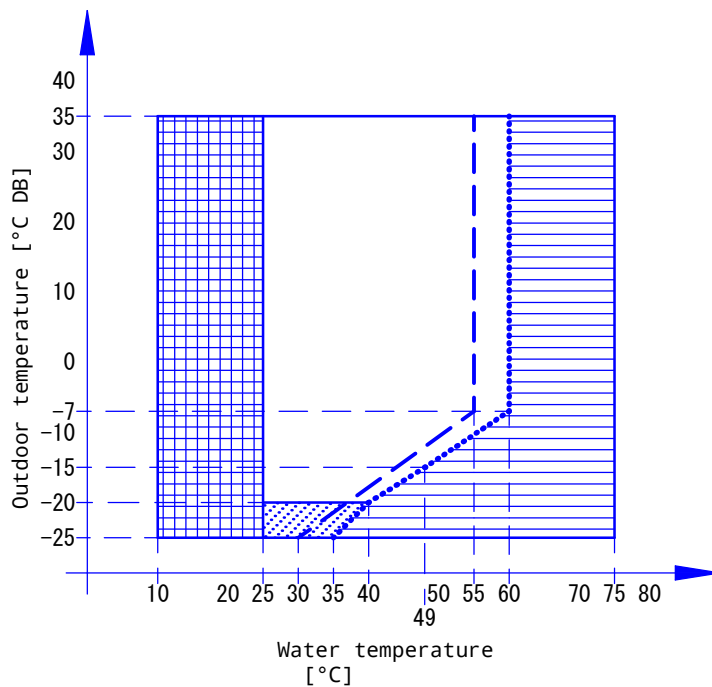


EBBH-D6V
 EBBH-D9W
 EBBX-D6V
 EBBX-D9W
 EBVH-D6V
 EBVH-D9W
 EBVH-UD6V
 EBVX-D6V
 EBVX-D9W

Legend

-  Setpoint [°C]
-  Leaving water temperature [°C]
-  Pull-up area
-  Operation of outdoor unit possible, but with possible capacity reduction.
-  Booster heater only operation (if a booster heater is part of the system)



Notes

1. In restricted power supply mode (·EKHW*· only), the outdoor unit, booster heater and backup heater can only operate separately.
2. Third-party with identical specifications as ·EKHS*·
 Coil surface >·1.05·m² and <·3.7·m²
 Tank thermistor and booster heater above heat pump coil.
3. If negative ambient temperatures are expected, both in operation or at standstill, take adequate countermeasures against freezing.
 For more information, refer to the installation manual.