


Domestic hot water heating mode

EKHS*150*
 EKHS*180*
 +

Third-party with identical specifications as ·EKHS*150*·

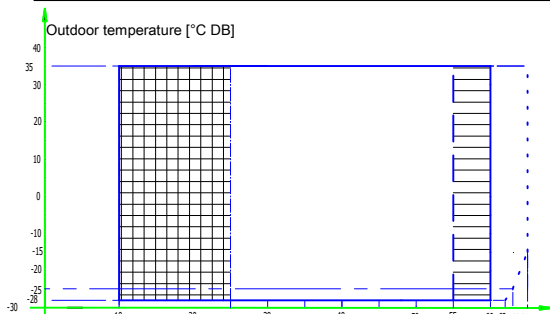


Leaving water condensor temperature [°C]

Legend

- Setpoint [°C]
Domestic hot water
 - · · Leaving water temperature [°C]
 - Pull-up area
 - Booster heater only operation (if a booster heater is part of the system)
- (1)ETV*12*E· indoor units only
 (2)Combination of ·EKHS*· and ·ETB*12*E· indoor units
 (3)Combination of ·EKHP*· and ·ETB*12*E· indoor units

ETV* + EKHP* + ETS* + EKHS*200*
 EKHS*250*
 EKHS*300*
 +

Third-party with identical specifications as ·EKHS*200*·

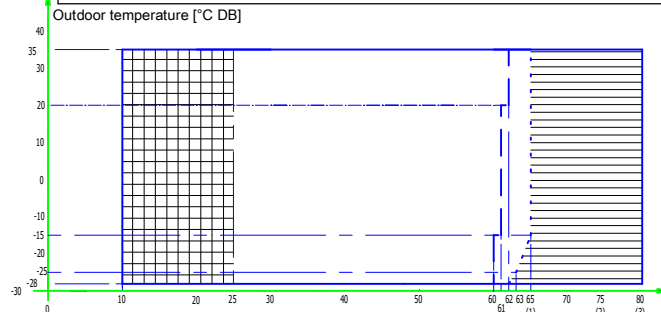

Leaving water condensor temperature [°C]

·ETS*12*E· indoor units only

Notes

1. In restricted power supply mode (·EKHW*· only), the outdoor unit, booster heater and backup heater can only operate separately.
2. Third-party with identical specifications as ·EKHS*150*·
 Coil surface >1.05·m² and <3.7·m²
 Tank thermistor and booster heater above heat pump coil.
3. If negative ambient temperatures are expected, both in operation or at standstill, take adequate countermeasures against freezing.

For more information, refer to the installation manual.

4. Third-party with identical specifications as ·EKHS*200*·
 Coil surface >1.8·m² and <3.7·m²
 Tank thermistor and booster heater above heat pump coil.