


ETSH16E7/ETSHB16E7

ETSX16E7/ETSB16E7

Heat-up times

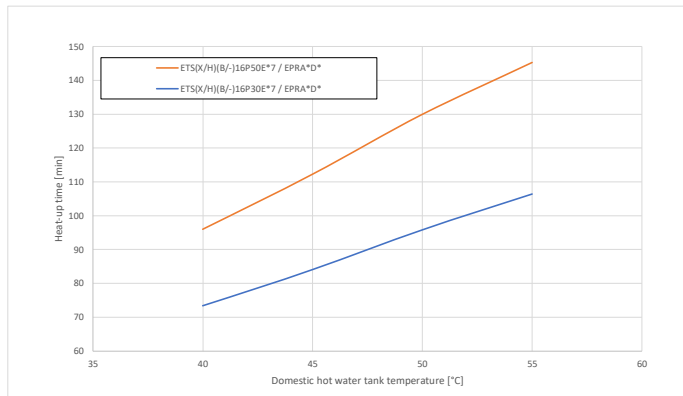

Heat-up time domestic hot water tank until 45°C	
ETS(X/H)(B/-)16P30E*7 / EPRA*D*	-84- min.
ETS(X/H)(B/-)16P50E*7 / EPRA*D*	-112- min.

Selection guide for the domestic hot water tank volume

Ve_q 40°C = the amount of water with a temperature of 40°C that can be tapped when the domestic hot water tank is heated to a certain temperature, and the temperature of the cold inlet water is 10°C, draw-off volume flow = 10 l/min

