
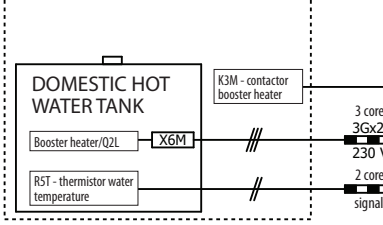


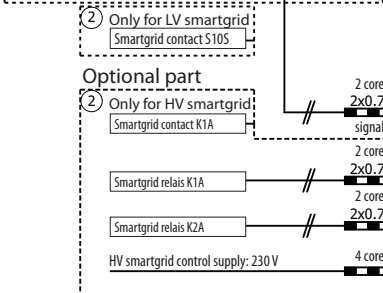




EBBH-D6V
EBBH-D9W
EBBX-D6V
EBBX-D9W

Power supply







- ① Only for normal power supply installation
unit power supply: 400 V or 230 V + earth
- ② Only for preferential kWh rate power supply installation
unit preferential kWh rate power supply:
400 V or 230 V + earth




OPTIONAL PART

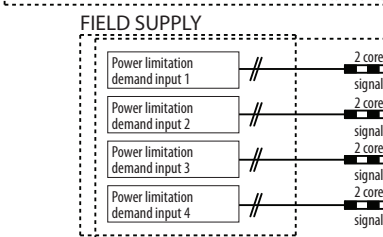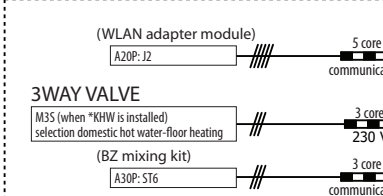

STANDARD PART

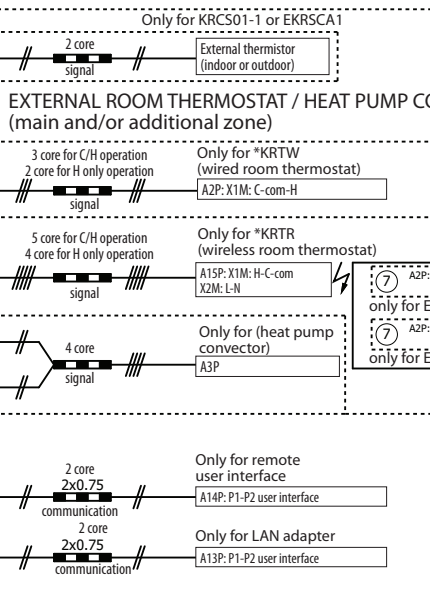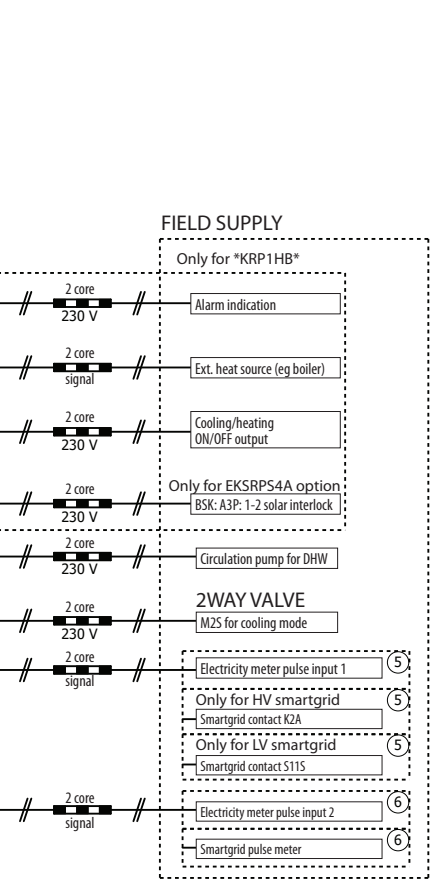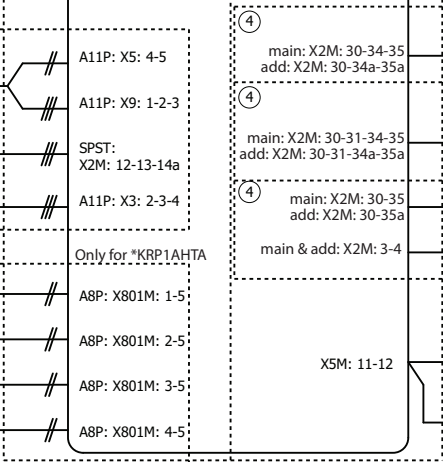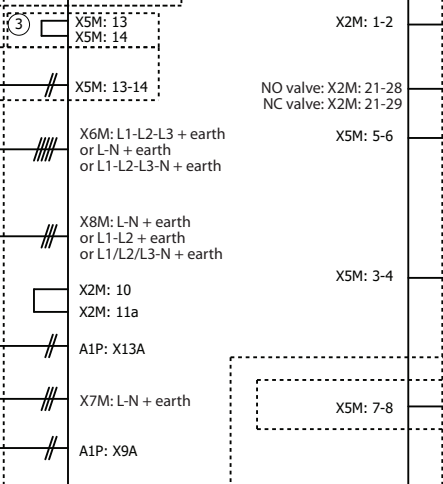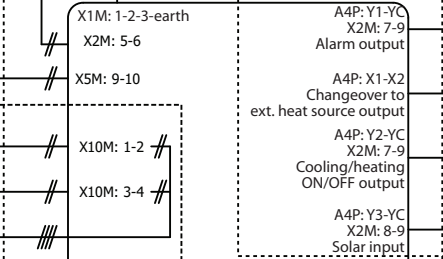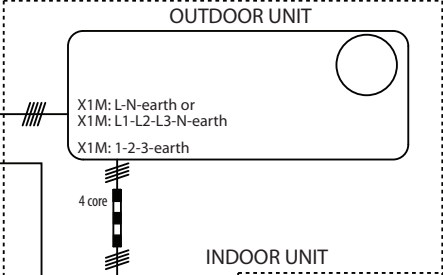

OPTIONAL PART



NOTE

- In case of signal cable: keep minimum distance to power cables > 5 cm
- Available heaters depending on model: see combination table