
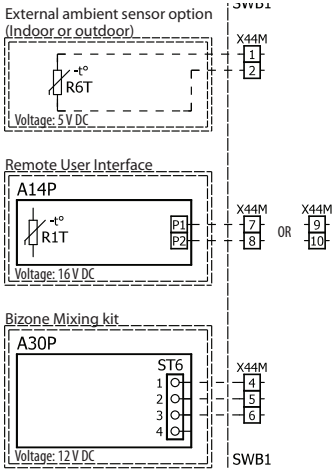


EPBX10A4V / EPBX10A9W

EPBX14A4V / EPBX14A9W

Possible connections for X44M / X45M

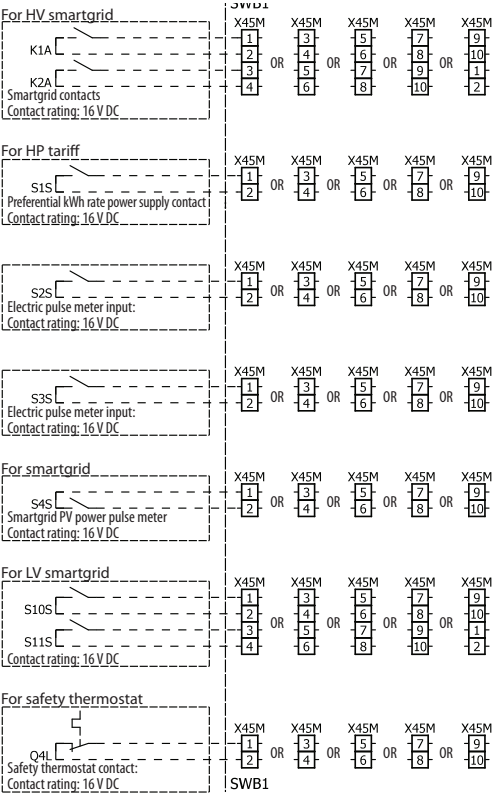

X44M Ports	Description	Max. No of wires per position
1	External Thermistor	1
2	External Thermistor GND	1
3	CAN Bus VCC	1
4	CAN Bus High	1
5	CAN Bus Low	1
6	CAN Bus GND	1
7	P1 - 1	1
8	P2 - 1	1
9	P1 - 2	1
10	P2 - 2	1

X43M Ports	Description	Max. No of wires per position
1	Spare Voltage Free Contact NO 1	1
2	Spare Voltage Free Contact GND 1	1
3	Spare Voltage Free Contact NO 2	1
4	Spare Voltage Free Contact GND 2	1
5	Spare Voltage Free Contact NO 3	1
6	Spare Voltage Free Contact GND 3	1
7	Spare Voltage Free Contact NO 4	1
8	Spare Voltage Free Contact GND 4	1
9	Spare Voltage Free Contact NO 5	1
10	Spare Voltage Free Contact GND 5	1

- NOTES**
1. Recommended to use High Grade Contact material.
 2. For Ports 1 to 10 of X45M: Only ON/OFF voltage free contact.
 3. Terminal combinations can only be used for one option.