EPSK06-10AV3
EPSK08-10AW1

Domestic hot water heating mode

EPV*A + EPS*A + EKHWP* + EKHWS*200* / EKHWS*250* / EKHWS*300* + Third-party with identical specifications as ·EKHWS*200·

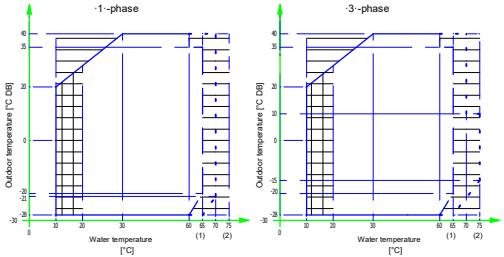

EPV*U*A + EKHWSU*200* / EKHWSU*250* / EKHWSU*300* + Third-party with identical specifications as ·EKHWSU*200*·



EKHWS*150* / EKHWS*180* + Third-party with identical specifications as ·EKHWS*150·

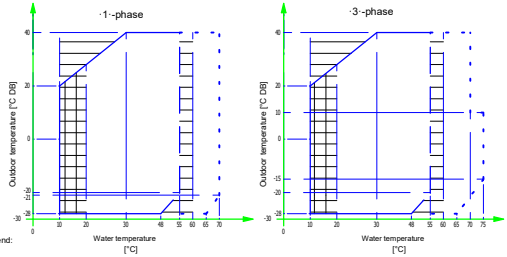

EKHWSU*150* / EKHWSU*180* + Third-party with identical specifications as ·EKHWSU*150*



Legend:

- Setpoint [°C] Domestic hot water
- Leaving water temperature [°C]
- Pull-up area
- Backup heater only operation (or booster heater, if part of the system)
  - (1) ·EPV*A*· indoor units only
  - (2) ·EPS*A*· indoor units only
  - (3) ·EPB*U*A*· indoor units only + EKHWSU*

Notes:

1. In restricted power supply mode (·EKHW*· only), the outdoor unit, booster heater and backup heater can only operate separately.
2. Third-party with identical specifications as ·EKHWS*150·
   Coil surface > 1.05 m² and < 3.7 m²
   Tank thermistor and booster heater above heat pump coil.
3. If negative ambient temperatures are expected, both in operation or at standstill, take adequate countermeasures against freezing.
   For more information, refer to the installation manual.
4. Third-party with identical specifications as ·EKHWS*200·
   Coil surface > 1.8 m² and < 3.7 m²
   Tank thermistor and booster heater above heat pump coil.