


Heat-up times

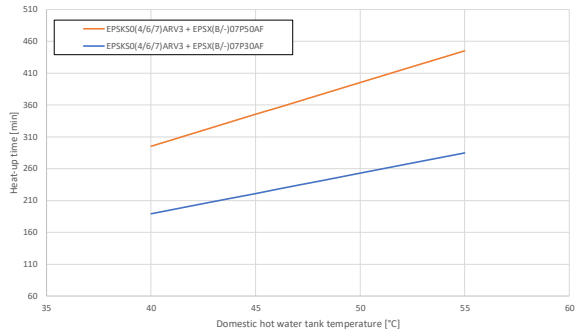

	Heat-up time domestic hot water tank until 45°C
EPSX(B/-)J07P30AF	-221- min.
EPSX(B/-)J07P50AF	-345- min.

Selection guide for the domestic hot water tank volume

Req 40°C = the amount of water with a temperature of 40°C that can be tapped when the domestic hot water tank is heated to a certain temperature, and the temperature of the cold inlet water is 10°C; draw-off volume flow = 10 l/min

