


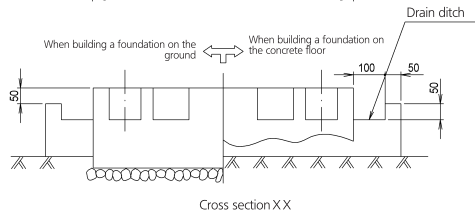


# LRYEQ-AY

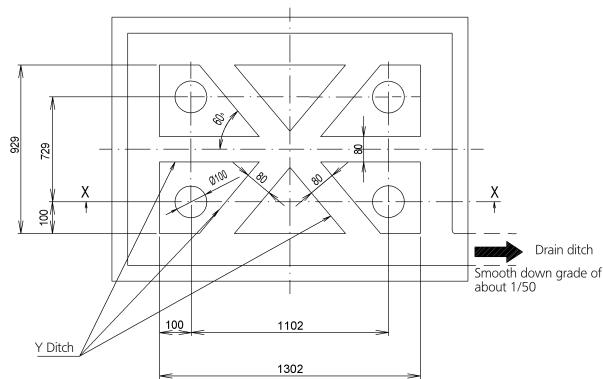

## Notes

- 1 Use a cement/sand/gravel ratio of 1/2/4 for the concrete, and a diameter of 10mm for the reinforcement bars (approximately, 300mm intervals).
- 2 The surface has to be finished with mortar. The corner edges have to be chamfered.
- 3 Build the foundation on a concrete floor or, if not possible, make sure the foundation surface has a rough finish.
- 4 Provide a drain ditch around the foundation to drain water from the installation area.
- 5 When installing the equipment on a roof, make sure to check the strength of the floor and take adequate water proofing measures.