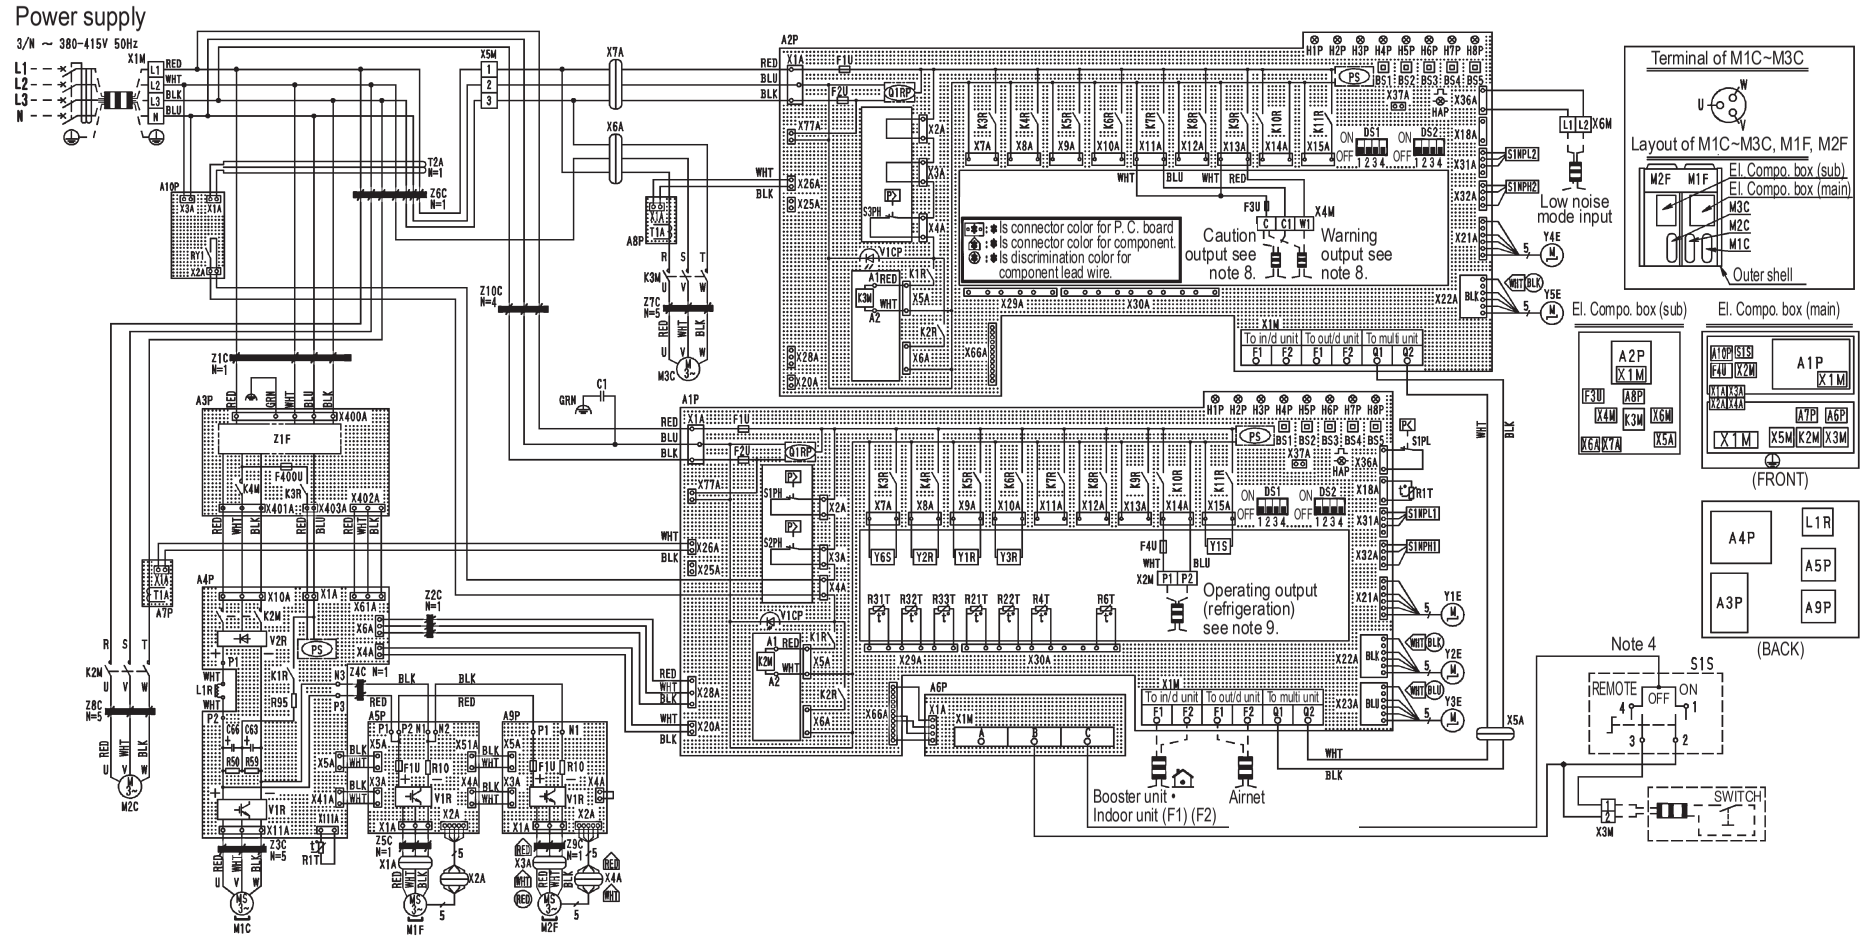
Power supply
3/N ~ 380~415V 50Hz
L1
L2
L3
N
Is connector color for P. C. board
Is connector color for component.
Is discrimination color for component lead wire.
Caution output see note 8.
Warning output see note 8.
Low noise mode input
Terminal of M1C~M3C
Layout of M1C~M3C, M1F, M2F
El. Compo. box (sub)
El. Compo. box (main)
Outer shell
(FRONT)
(BACK)
Operating output (refrigeration) see note 9.
Booster unit • Indoor unit (F1) (F2)
Airnet
Note 4
REMOTE
OFF
ON
SWITCH