


LRYEQ16AY

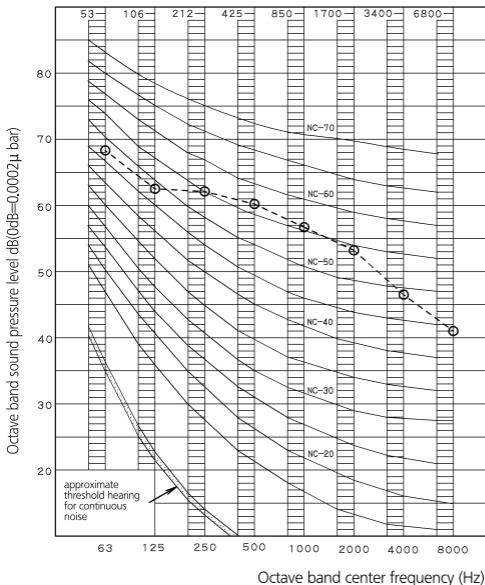

Overall (dB)

Scale	50Hz
A	62.0
C	71.0

(B,G,N is already rectified)

Measuring place

Anechoic chamber (conversion value)

Note: The operating sound is measured in anechoic chamber, if it is measured under the actual installation conditions, it is normally over the set value due to environmental noise and sound reflection.

Operating conditions

Power source: 380-415V 50Hz

JIS Standard

Location of microphone

