


LREN-A

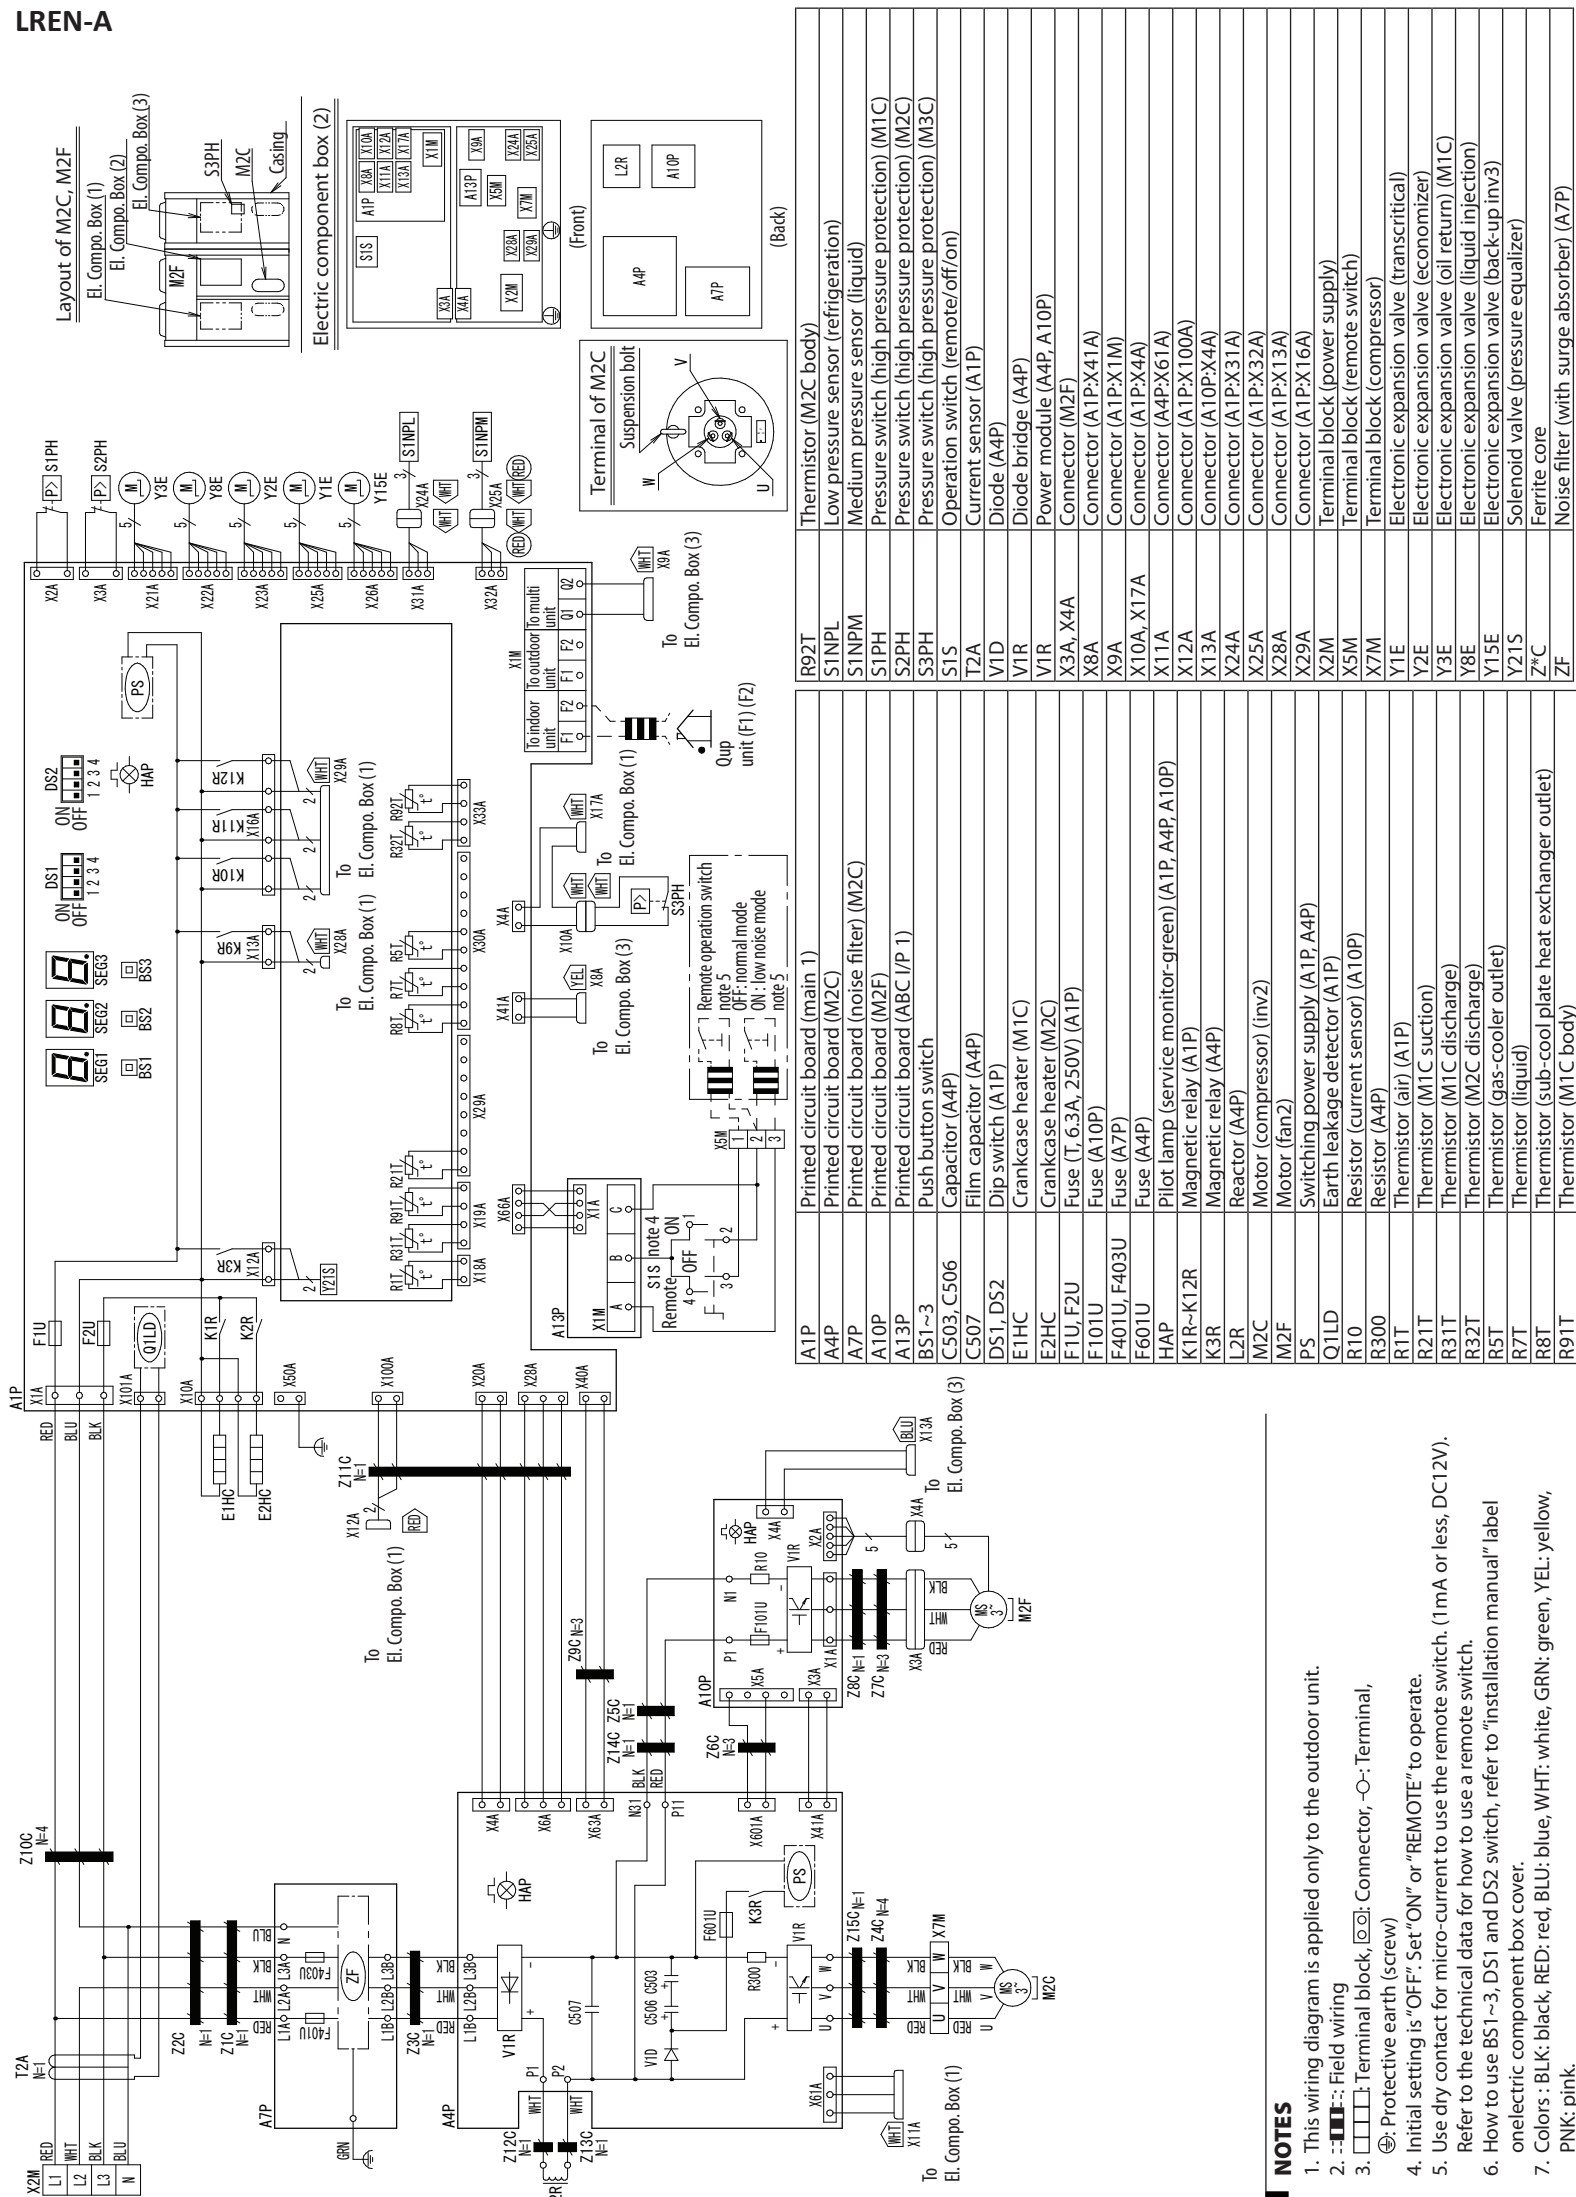

NOTES

1. This wiring diagram is applied only to the outdoor unit.
2. : Field wiring
3. : Terminal block, : Connector, : Terminal, : Protective earth (screw)
4. Initial setting is "OFF", Set "ON" or "REMOTE" to operate.
5. Use dry contact for micro-current to use the remote switch. (1mA or less, DC12V). Refer to the technical data for how to use a remote switch.
6. How to use BS1 ~ 3, D51 and D52 switch, refer to "installation manual" label on electric component box cover.
7. Colors : BLK: black, RED: red, BLU: blue, WHT: white, GRN: green, YEL: yellow, PNK: pink.