



AZQS100B8V1
AZQS100BY1

Cooling

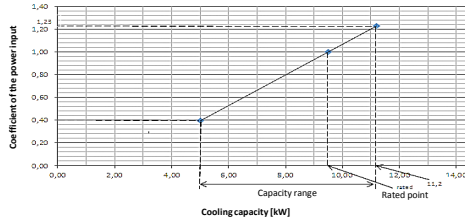

Heating

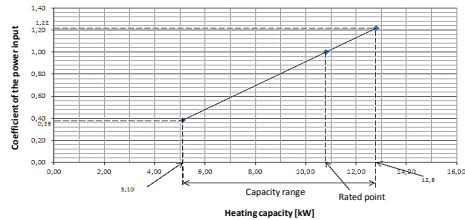

- Symbols**
 AFR: Air flow rate [m³/min]
 BF: Bypass factor
 EWB: Entering wet-bulb temperature (°C WB)
 EDB: Entering dry-bulb temperature (°C DB)
 TC: Maximum total cooling/heating capacity [kW]
 SHC: Sensible heat capacity [kW]
 CPI: Coefficient of the power input
 PI: Power input [kW]
 compressor + indoor and outdoor fan motors

Cooling

| Indoor | Outdoor Temperature (°C DB) | | | | | | | | | | | | |
|--------|-----------------------------|------|------|------|------|------|------|-------------|-------------|-------------|------|------|------|
| | 25 | | | 30 | | | 35 | | | 40 | | | |
| | TC | SHC | CPI | TC | SHC | CPI | TC | SHC | CPI | TC | SHC | CPI | |
| °C WB | °C DB | kW | kW | - | kW | kW | - | kW | kW | - | kW | kW | - |
| 16.0 | 22 | 11.2 | 7.61 | 1.01 | 10.8 | 7.44 | 1.11 | 10.5 | 7.29 | 1.22 | 10.1 | 7.09 | 1.32 |
| 18.0 | 25 | 11.8 | 7.59 | 1.01 | 11.4 | 7.49 | 1.12 | 11.0 | 7.27 | 1.23 | 10.5 | 7.08 | 1.33 |
| 19.0 | 27 | 12.0 | 7.57 | 1.02 | 11.6 | 7.44 | 1.12 | 11.2 | 7.26 | 1.23 | 10.8 | 7.04 | 1.33 |
| 19.5 | 27 | 12.1 | 7.59 | 1.02 | 11.7 | 7.37 | 1.13 | 11.4 | 7.34 | 1.23 | 10.8 | 7.04 | 1.34 |
| 22.0 | 30 | 12.8 | 7.52 | 1.02 | 12.4 | 7.36 | 1.13 | 11.9 | 7.16 | 1.24 | 11.5 | 7.03 | 1.35 |
| 24.0 | 32 | 13.3 | 7.42 | 1.03 | 12.9 | 7.27 | 1.14 | 12.4 | 7.06 | 1.25 | 12.0 | 6.91 | 1.36 |

Heating

| Indoor | Outdoor temperature (°C WB) | | | | | | | | | | | |
|--------|-----------------------------|------|-------|------|------|------|------|------|-------------|-------------|------|------|
| | -15.0 | | -10.0 | | -5.0 | | 0.0 | | 6.0 | | 10.0 | |
| | TC | OPI | TC | OPI | TC | OPI | TC | OPI | TC | OPI | TC | OPI |
| °C DB | kW | - | kW | - | kW | - | kW | - | kW | - | kW | - |
| 16 | 8.89 | 0.93 | 9.45 | 0.99 | 10.1 | 1.02 | 10.4 | 1.05 | 12.8 | 1.12 | 13.8 | 1.18 |
| 18 | 8.57 | 0.97 | 9.44 | 1.02 | 10.0 | 1.07 | 10.3 | 1.10 | 12.8 | 1.17 | 13.8 | 1.23 |
| 20 | 8.56 | 1.01 | 9.43 | 1.07 | 10.0 | 1.11 | 10.3 | 1.14 | 12.8 | 1.22 | 13.8 | 1.28 |
| 21 | 8.56 | 1.03 | 9.42 | 1.09 | 10.0 | 1.13 | 10.3 | 1.16 | 12.8 | 1.24 | 13.8 | 1.30 |
| 22 | 8.55 | 1.04 | 9.42 | 1.10 | 10.0 | 1.14 | 10.3 | 1.18 | 12.8 | 1.26 | 13.8 | 1.33 |
| 24 | 8.54 | 1.09 | 9.41 | 1.15 | 10.0 | 1.19 | 10.3 | 1.23 | 12.8 | 1.31 | 13.8 | 1.38 |

Notes

- The ratings shown are net capacities which include a deduction for indoor fan motor heat.
- = Rated capacity and rated coefficient of the power input
 = Maximum at standard conditions
 The maximum capacity is not guaranteed except at standard conditions.
- SHC is based on indoor units EWB & EDB.
 SHC for other dry-bulb temperatures = SHC + SHC*
 SHC* = SHC correction for other dry-bulb temperatures
 = 0.02 x AFR (m³/min) x (1-BF) x (DB* - EDB)
- The capacities are based on the following conditions:
 Outdoor air: 85% RH
 However, the outdoor ambient condition of the rated capacity during heating operation is 7°C DB / 6°C WB.
 Corresponding refrigerant piping length: 5.0 m
 Level difference: 0m
- CPI is a percentage value compared to the rated value which is 1.00.
- The error rate for this value is less than 5% and depends on the indoor unit type.
- The heating performance takes into account the drop that occurs during defrost operation.
- The air flow rate and bypass factor are mentioned in the table.

| Pair | ACQ100DV1 | ADEQ100B | AHQ100CV1 | ABQ100CV1 |
|------|-----------|----------|-----------|-----------|
| AFR | 29.2 | 29.0 | 31.1 | 22.7 |
| (BF) | (0.253) | (0.09) | (0.174) | (0.175) |

- The rated power input for each model is mentioned in the table below.

| Pair | ACQ100DV1 | ADEQ100B | AHQ100CV1 | ABQ100CV1 |
|---------|-----------|----------|-----------|-----------|
| Cooling | 2.96 | 2.96 | 3.62 | 3.63 |
| Heating | 2.99 | 2.99 | 3.17 | 3.16 |