

FDQ125C




Installation without air inlet duct

Number	Description
1	Suspended ceiling
2	Ceiling opening
3	Service access panel (optional)
4	Air filter
5	Air inlet duct
6	Duct service opening

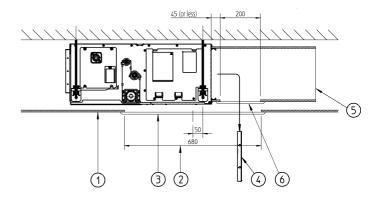

Installation with air inlet duct



NOTES

When installing the unit with rear suction, a service opening is necessary for the maintenance of the air filters.

When installing the unit with a suction duct, a service opening must be provided in the duct.