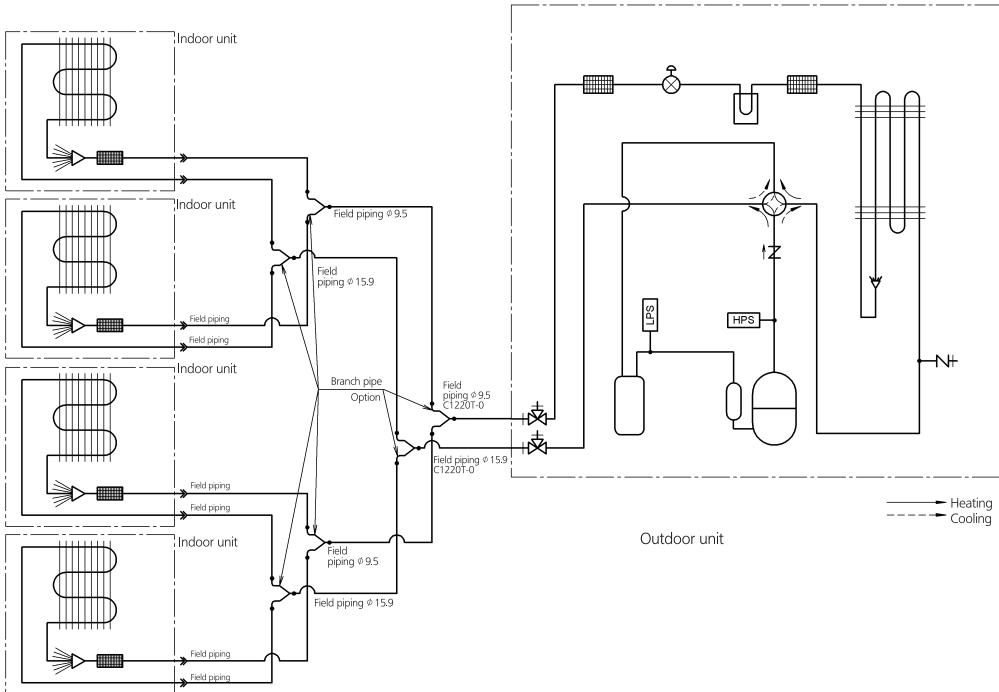
















# RZQSG125-140L9V1

## Double twin application



-  Accumulator
-  Heat exchanger
-  Electronic expansion valve
-  4-way valve
-  Service port 5/16" (flare)
-  HPS High pressure switch
-  LPS Low pressure switch
-  Compressor
-  Compressor Accumulator
-  Stop valve
-  Distributor
-  PCB Cooling
-  Check valve
-  Filter

- Notes:
- 1 The pipes between the branch and the indoor units should have the same size as the indoor connections.
  - 2 The check valve is only present in following models: RZQSG100L and RZQSG125L.