



RZQSG140L9V1 RZQSG140LY1

Cooling

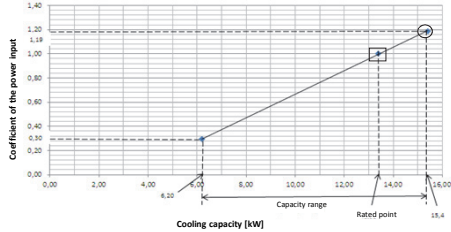

Heating

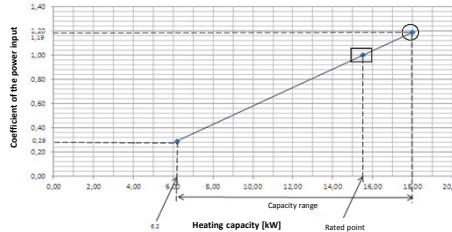

Symbols

- AFR: Air flow rate (m³/min)
- BF: Bypass factor
- EWB: Entering wet-bulb temperature (°C WB)
- EDB: Entering dry-bulb temperature (°C DB)
- TC: Maximum total cooling/heating capacity [kW]
- SHC: Sensible heat capacity [kW]
- CPI: Coefficient of the power input
- Pl: Power input [kW]
compressor + indoor and outdoor fan motors

Cooling

Indoor	Outdoor temperature [°C DB]												
	25			30			35			40			
	TC	SHC	CPI	TC	SHC	CPI	TC	SHC	CPI	TC	SHC	CPI	
TCWB	TCDB	W/W	W/W	—	W/W	W/W	—	W/W	W/W	—	W/W	W/W	—
18.0	22	15.5	10.47	0.98	14.9	10.25	1.09	14.4	10.03	1.18	13.9	9.89	1.28
18.0	25	16.2	10.55	0.98	15.6	10.21	1.09	15.1	10.01	1.19	14.5	9.71	1.30
19.0	27	16.6	10.43	0.99	16.0	10.18	1.09	15.4	9.98	1.19	14.8	9.76	1.30
19.5	27	16.7	10.49	0.99	16.1	10.16	1.10	15.6	10.00	1.19	15.0	9.66	1.30
22.0	30	17.6	10.37	0.99	17.0	10.16	1.10	16.4	9.83	1.21	15.8	9.60	1.31
24.0	32	18.4	10.20	1.00	17.7	10.00	1.11	17.0	9.67	1.22	16.4	9.47	1.32

Heating

Indoor	Outdoor temperature [°C WB]											
	-15.0		-10.0		-5.0		0.0		6.0		10.0	
	TC	CPI	TC	CPI	TC	CPI	TC	CPI	TC	CPI	TC	CPI
TCWB	TCDB	—	—	—	—	—	—	—	—	—	—	—
16	11.6	0.91	12.7	0.97	13.6	1.00	13.9	1.03	18.0	1.09	19.4	1.16
18	11.6	0.95	12.7	1.00	13.6	1.04	13.9	1.07	18.0	1.14	19.4	1.21
20	11.6	0.99	12.7	1.05	13.5	1.09	13.9	1.11	18.0	1.19	19.4	1.25
21	11.5	1.00	12.7	1.06	13.5	1.11	13.9	1.13	18.0	1.21	19.4	1.28
22	11.5	1.02	12.7	1.08	13.5	1.12	13.9	1.16	18.0	1.24	19.4	1.30
24	11.5	1.07	12.6	1.12	13.5	1.17	13.9	1.20	18.0	1.29	19.4	1.35

Notes

- The ratings shown are net capacities which include a deduction for indoor fan motor heat.
- = Maximum at standard conditions
□ = Rated capacity and rated coefficient of the power input
The maximum capacity is not guaranteed except at standard conditions.
- SHC is based on indoor units EWB & EDB.
SHC for other dry-bulb temperatures = SHC + SHC*
SHC* = SHC correction for other dry-bulb temperatures
= 0.02 x AFR (m³/min) x (1-BF) x (DB* - EDB)
- The capacities are based on the following conditions:
Outdoor air: 85% RH
However, the outdoor ambient condition of the rated capacity during heating operation is 7°C DB / 6°C WB.
Corresponding refrigerant piping length: 5.0 m
Level difference: 0m
- CPI is a percentage value compared to the rated value which is 1.00.
- The error rate for this value is less than 5% and depends on the indoor unit type.
- The heating performance takes into account the drop that occurs during defrost operation.
- The air flow rate and bypass factor are mentioned in the table.

- The rated power input for each model is mentioned in the table below.

Pair	FCQG140F	FCG140F	FBQ140C	FBQ140C	FVQ140C	FBQ140CB	FBQ140D
AFR	33.5	33.0	39.7/41H	34.0	30.0	34.0	34.0
(BF)	(0.15)	(0.23)	(0.14)	(0.17)	(0.18)	(0.17)	(0.06)

Pair	FCQG140F	FCG140F	FBQ140C	FBQ140C	FVQ140C	FBQ140CB	FBQ140D
Cooling	4.17	4.45	4.44	4.45	4.45	4.45	4.38
Heating	4.29	4.54	4.54	4.54	4.54	4.54	4.55

Twin	FCQG71F X 2	FCG71F X 2	FBQ71C X 2	FBQ71C X 2	FAQ71C X 2	FBQ71CB X 2	FBQ71D X 2	FUQ71C X 2
AFR	21.2 x 2	21.5 x 2	18.0 x 2	20.5 x 2	18.0 x 2	20.5 x 2	18 x 2	23.0 x 2
(BF)	(0.2 x 2)	(0.14 x 2)	(0.13 x 2)	(0.13 x 2)	(0.16 x 2)	(0.13 x 2)	(0.13 x 2)	(0.24 x 2)

Twin	FCQG71F X 2	FCG71F X 2	FBQ71C X 2	FBQ71C X 2	FAQ71C X 2	FBQ71CB X 2	FBQ71D X 2	FUQ71C X 2
Cooling	4.11	4.39	4.17	4.01	4.23	4.01	4.17	4.39
Heating	4.23	4.48	4.94	4.71	4.92	4.71	4.94	4.94

Triple	FCQ350F X 3	FBQ350C X 3	FBQ350CB X 3	FBQ350C X 3	FDX350FP X 3	FBQ350D X 3	FBQ350A X 3
AFR	12.6 x 3	16 x 3	15 x 3	12 x 3	16 x 3	15 x 3	16 x 3
(BF)	(0.22 x 3)	(0.16 x 3)	(0.18 x 3)	(0.16 x 3)	(0.11 x 3)	(0.13 x 3)	(0.11 x 3)

Triple	FCQ350F X 3	FBQ350C X 3	FBQ350CB X 3	FBQ350C X 3	FDX350FP X 3	FBQ350D X 3	FBQ350A X 3
Cooling	4.40	4.17	4.67	4.43	4.68	4.17	4.68
Heating	4.48	4.94	5.67	4.39	4.61	4.94	4.61

Double twin	FCQ35F X 4	FBQ35C X 4	FBQ35CB X 4	FBQ35C X 4	FDX35FP X 4	FBQ35D X 4	FBQ35A X 4
AFR	12.5 x 4	16 x 4	14 x 4	10 x 4	15 x 4	15 x 4	16 x 4
(BF)	(0.4 x 4)	(0.15 x 4)	(0.20 x 4)	(0.25 x 4)	(0.17 x 4)	(0.08 x 4)	(0.17 x 4)

Double twin	FCQ35F X 4	FBQ35C X 4	FBQ35CB X 4	FBQ35C X 4	FDX35FP X 4	FBQ35D X 4	FBQ35A X 4
Cooling	4.56	4.17	4.65	4.11	5.80	4.17	5.80
Heating	4.54	4.94	5.57	4.05	6.09	4.94	6.09