



Cooling

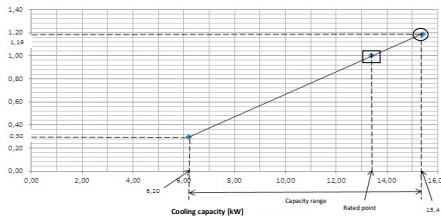

Heating

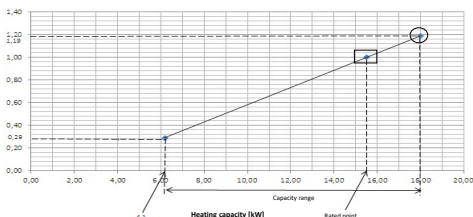

Notes

- The ratings shown are net capacities which include a deduction for indoor fan motor heat.
 - = Maximum at standard conditions
 - = Rated capacity and rated coefficient of the power inputThe maximum capacity is not guaranteed except at standard conditions.
- SHC is based on indoor units FWA & EDB.
SHC for other dry-bulb temperatures = SHC + SHC*
SHC* = SHC correction for other dry-bulb temperatures
= $0.02 \times \text{AFR} (\text{m}^3/\text{min}) \times (1 - \text{BF}) \times (\text{DB}^* - \text{EDB})$
- The capacities are based on the following conditions:
Outdoor air: 85% RH:
However, the outdoor ambient condition of the rated capacity during heating operation is -7°C DB / 6°C WB.
Corresponding refrigerant piping length: 5.0 m
Level difference: 0 m
- CPI is a percentage value compared to the rated value which is -1.00.
- The error rate for this value is less than -5% and depends on the indoor unit type.
- The heating performance takes into account the drop that occurs during defrost operation.
- The air flow rate and bypass factor are mentioned in the table.
- The rated power input for each model is mentioned in the table below.

Pair	FCAG140B	FVA140A	FHA140A	FBA140A
AFR	26.0	30.0	34.0	34.0
(BF)	(0.23)	(0.18)	(0.17)	(0.06)

Twin	FCAG71B X 2	FAA71B X 2	FHA71A X 2	FUA71A X 2	FBA71A X 2	FVA71A X 2
AFR	15.3 x 2	18.0 x 2	20.5 x 2	23.0 x 2	18.0 x 2	16.0 x 2
(BF)	(0.14 x 2)	(0.16 x 2)	(0.13 x 2)	(0.24 x 2)	(0.13 x 2)	(0.16 x 2)

Triple	FCAG50B X 3	FHA50A X 3	FFA50A X 3	FDXM50F3 X 3	FBA50A X 3	FNA50A X 3
AFR	12.6 x 3	15.0 x 3	12.0 x 3	15.8 x 3	15.0 x 3	16.0 x 3
(BF)	(0.22 x 3)	(0.18 x 3)	(0.16 x 3)	(0.11 x 3)	(0.13 x 3)	(0.11 x 3)

Double twin	FCAG35B X 4	FHA35A X 4	FFA35A X 4	FDXM35F3 X 4	FBA35A X 4	FNA35A X 4
AFR	12.5 x 4	14.0 x 4	10.0 x 4	8.7 x 4	15.0 x 4	8.7 x 4
(BF)	(0.4 x 4)	(0.20 x 4)	(0.25 x 4)	(0.17 x 4)	(0.08 x 4)	(0.17 x 4)

Pair	FCAG140B	FVA140A	FHA140A	FBA140A
Cooling	5.15	5.41	5.12	5.04
Heating	3.98	4.42	4.07	3.89

Twin	FCAG71B X 2	FAA71B X 2	FHA71A X 2	FUA71A X 2	FBA71A X 2	FVA71A X 2
Cooling	4.42	4.63	4.18	4.13	4.88	4.72
Heating	3.87	4.46	4.15	3.99	4.45	4.77

Triple	FCAG50B X 3	FHA50A X 3	FFA50A X 3	FDXM50F3 X 3	FBA50A X 3	FNA50A X 3
Cooling	4.19	4.21	5.16	4.00	4.69	4.00
Heating	3.66	3.91	4.64	4.44	4.29	4.44

Double twin	FCAG35B X 4	FHA35A X 4	FFA35A X 4	FDXM35F3 X 4	FBA35A X 4	FNA35A X 4
Cooling	3.25	3.93	4.17	4.64	4.39	4.64
Heating	3.97	4.33	4.15	4.42	4.19	4.42

Cooling

Indoor		Outdoor temperature [°C DB]											
		25			30			35			40		
		TC	SHC	CPI	TC	SHC	CPI	TC	SHC	CPI	TC	SHC	CPI
[°C WB]	[°C DB]	kW	kW	-	kW	kW	-	kW	kW	-	kW	kW	-
16.0	22	15.5	10.47	0.98	14.9	10.25	1.08	14.4	10.03	1.18	13.9	9.69	1.28
18.0	25	16.2	10.55	0.98	15.6	10.21	1.09	15.1	10.01	1.19	14.5	9.71	1.30
19.0	27	16.6	10.43	0.99	16.0	10.18	1.09	15.4	9.98	1.19	14.8	9.76	1.30
19.5	27	16.7	10.49	0.99	16.1	10.16	1.10	15.6	10.00	1.19	15.0	9.66	1.30
22.0	30	17.6	10.37	0.99	17.0	10.16	1.10	16.4	9.83	1.21	15.8	9.60	1.31
24.0	32	18.4	10.20	1.00	17.7	10.00	1.11	17.0	9.67	1.22	16.4	9.47	1.32

Heating

Indoor		Outdoor temperature [°C DB]											
		-15		-10		-5		0		6		10	
		TC	CPI	TC	CPI	TC	CPI	TC	CPI	TC	CPI	TC	CPI
[°C DB]	kW	-	-	kW	-	kW	-	kW	-	kW	-	kW	-
16	11.6	0.91	12.7	0.97	13.6	1.00	13.9	1.03	18.0	1.09	19.4	1.16	
18	11.6	0.95	12.7	1.00	13.6	1.04	13.9	1.07	18.0	1.14	19.4	1.21	
20	11.6	0.99	12.7	1.05	13.5	1.09	13.9	1.11	18.0	1.19	19.4	1.25	
21	11.5	1.00	12.7	1.06	13.5	1.11	13.9	1.13	18.0	1.21	19.4	1.28	
22	11.5	1.02	12.7	1.08	13.5	1.12	13.9	1.16	18.0	1.24	19.4	1.30	
24	11.5	1.07	12.6	1.12	13.5	1.17	13.9	1.20	18.0	1.29	19.4	1.35	

Symbols

AFR: Air flow rate (m³/min)

BF: Bypass factor

EWB: Entering wet-bulb temperature (°C WB)

EDB: Entering dry-bulb temperature (°C DB)

TC: Maximum total cooling/heating capacity (kW)

SHC: Sensible heat capacity (kW)

CPI: Coefficient of the power input

Pl: Power input (kW)

compressor + indoor and outdoor fan motors