
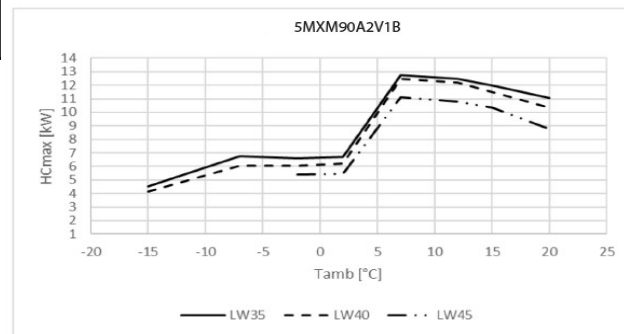


4MXM80A

5MXM-A

Only for ·CHYHB08AAV32·

Maximum heating capacity - integrated value													
	LWT [°C]	25		30		35		39		45		50	
	T _{amb} [°C]	HC [kW]	PI [kW]	HC [kW]	PI [kW]	HC [kW]	PI [kW]	HC [kW]	PI [kW]	HC [kW]	PI [kW]	HC [kW]	PI [kW]
4MXM80A2V1B	-15	5,60	2,55	4,73	2,41	4,51	2,42	4,13	2,30				
	-7	7,77	2,20	7,08	2,35	6,40	2,55	5,71	2,86				
	-2	7,19	1,95	6,71	2,07	6,26	2,23	5,81	2,45	5,11	2,76		
	2	7,05	1,76	6,72	1,88	6,38	2,05	6,04	2,26	5,17	2,29		
	7	13,67	3,22	12,82	3,24	11,74	3,19	11,52	3,37	10,13	3,39	9,36	3,27
	12	13,53	2,61	12,69	2,62	11,50	2,61	11,29	2,80	9,83	2,84	8,98	2,65
	15	13,12	1,85	12,31	2,30	11,03	1,88	10,60	2,46	9,42	2,51	8,33	2,35
	20	12,44	1,70	11,66	1,71	10,21	1,75	9,56	1,92	8,00	1,96	7,20	1,86
5MXM90A2V1B	-15	5,60	2,55	4,73	2,58	4,51	2,42	4,13	2,30				
	-7	8,17	2,32	7,47	2,48	6,77	2,70	6,07	3,04				
	-2	7,95	2,23	7,24	2,29	6,57	2,36	6,04	2,48	5,41	3,09		
	2	8,08	2,15	7,38	2,16	6,68	2,17	6,23	2,21	5,46	2,71		
	7	14,63	3,58	13,79	3,61	12,73	3,64	12,47	3,67	11,14	3,73	10,36	3,76
	12	14,49	2,90	13,65	2,92	12,48	2,98	12,22	3,05	10,80	3,13	9,94	3,05
	15	14,05	2,06	13,24	2,56	11,97	2,15	11,47	2,68	10,36	2,76	9,22	2,71
	20	13,32	1,90	12,55	1,91	11,08	2,00	10,35	2,09	8,80	2,16	7,98	2,14

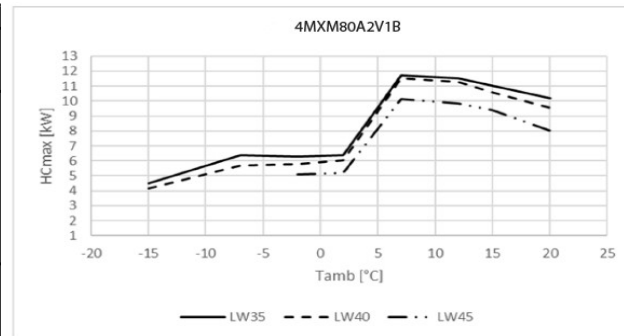

Symbols

- HC Heating capacity at maximum operating frequency, measured according to EN 14511
- PI Power input is the total input of indoor and outdoor units, including the circulation pump; according to EN 14511.
- LWT Leaving water condensor temperature [°C]
- Tamb Ambient temperature

Conditions

Heating capacity

Capacity according to standard EN 14511 and valid for heated water range $\Delta T = 3\sim 8^{\circ}\text{C}$.

Power input

Power input is the total input of indoor and outdoor units, including the circulation pump; according to EN 14511.

Notes

The capacity and the power input are at maximum operation.