



ARXC60D
RXC60D

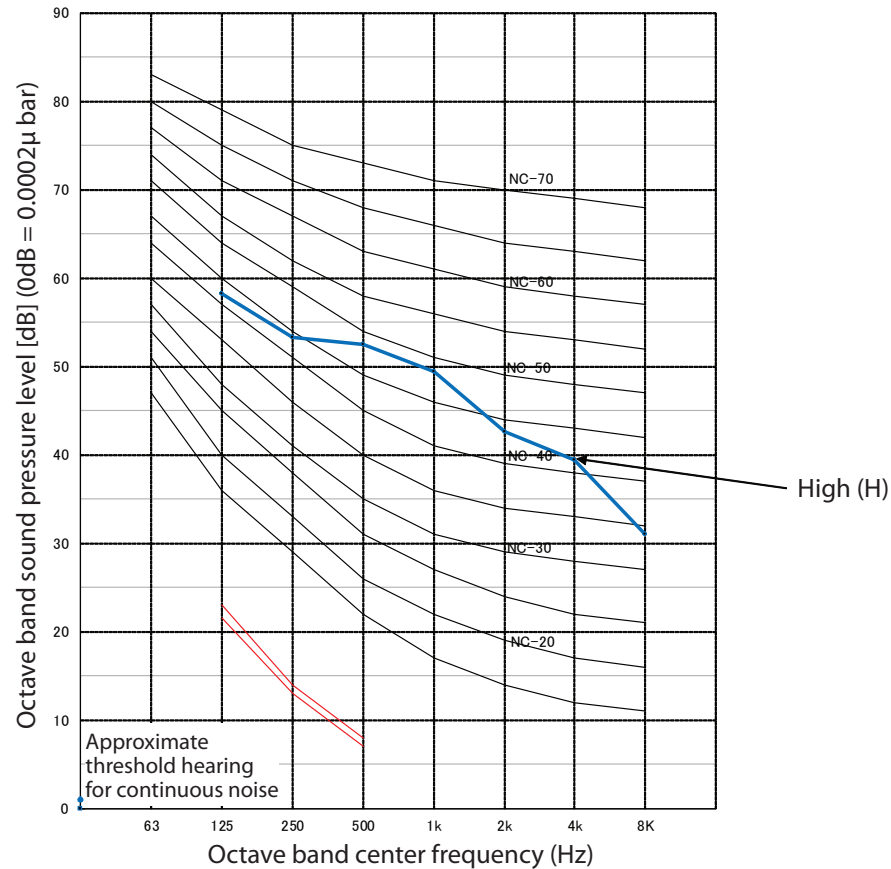

- NOTES**
- 1. Measuring place
Anechoic chamber
Operation noise differs with operation and ambient conditions.
 - 2. Operating conditions
Power source: 220-240V 50Hz
 - 3. Location of microphone.

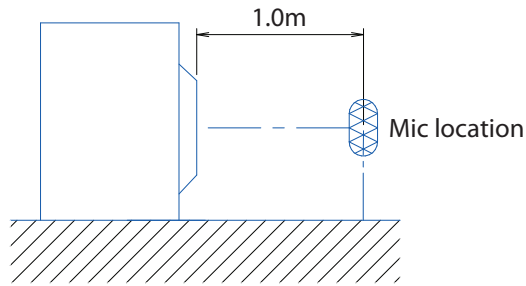

Testing Data Input								Overall (dBA)	Noise criteria
Fan speed	125	250	500	1k	2k	4k	8k		
H	58	53	52	49	43	39	31	54	49