



# ATXC20-25D / FTXC20-25D

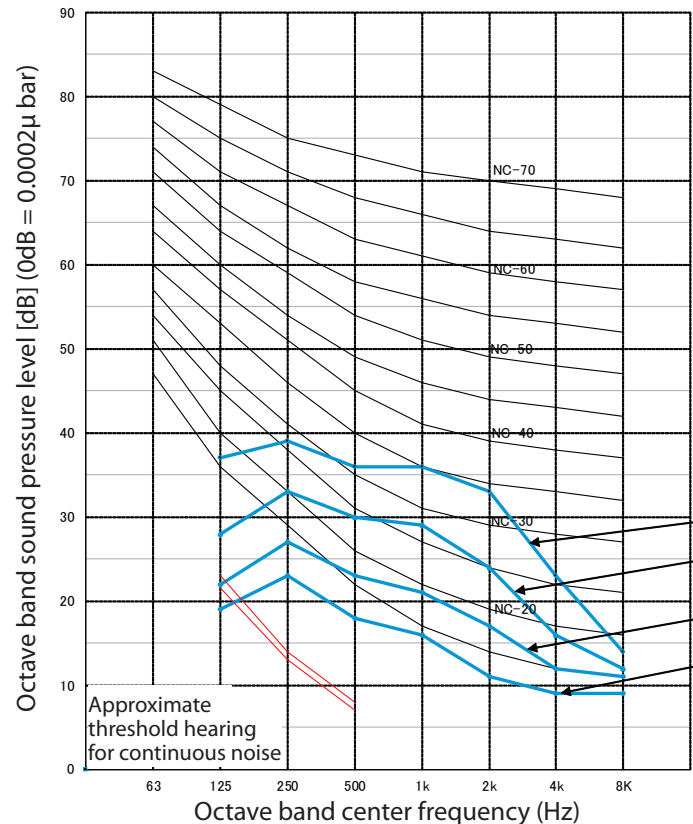

High (H)  
 Medium (M)  
 Low (L)  
 Silent (SL)

## NOTES

1. Measuring place  
 Anechoic chamber  
 Operation noise differs with operation and ambient conditions.
2. Operating conditions  
 Power source: 220-240V 50Hz
3. Location of microphone.

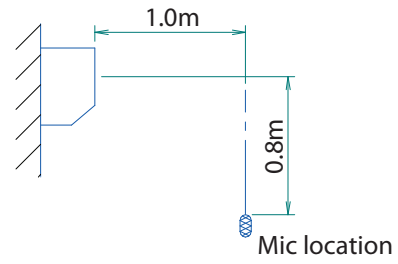

Testing Data Input								Overall (dBA)	Noise criteria
Fan speed	125	250	500	1k	2k	4k	8k		
H	37	39	36	36	33	23	14	40	35
M	28	33	30	29	24	16	12	33	28
L	22	27	23	21	17	12	11	26	19
SL	19	23	18	16	11	9	9	21	-