



ATXC35D / FTXC35D

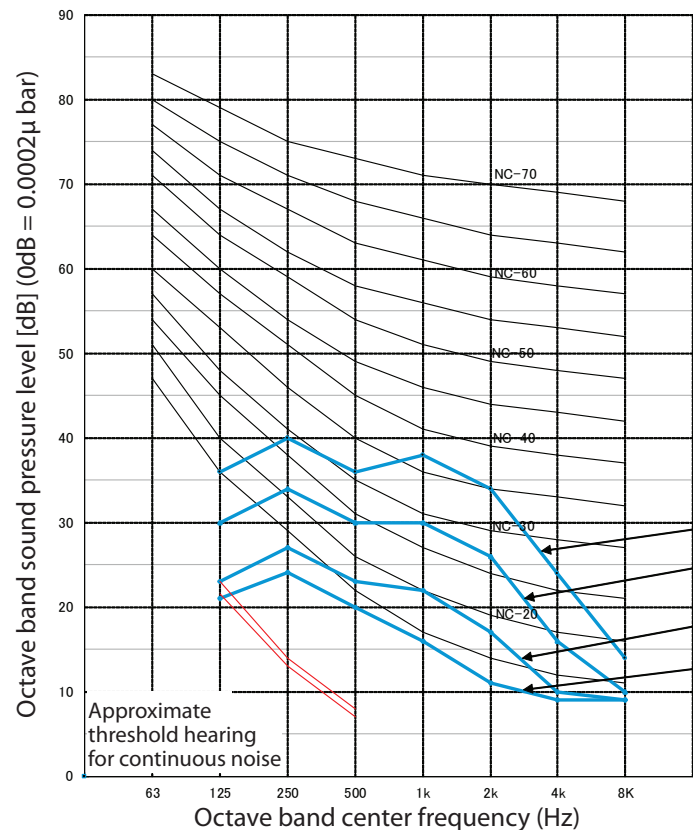

NOTES

1. Measuring place
Anechoic chamber
Operation noise differs with operation and ambient conditions.
2. Operating conditions
Power source: 220-240V 50Hz
3. Location of microphone.

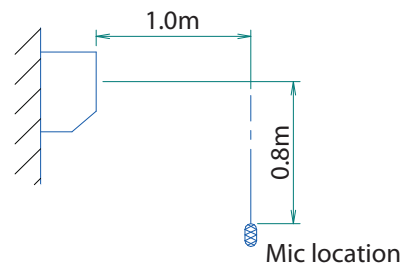

Testing Data Input								Overall (dBA)	Noise criteria
Fan speed	125	250	500	1k	2k	4k	8k		
H	36	40	36	38	34	24	14	41	37
M	30	34	30	30	26	16	10	34	29
L	23	27	23	22	17	10	9	26	20
SL	21	24	20	16	11	9	9	22	-