ATXM50M

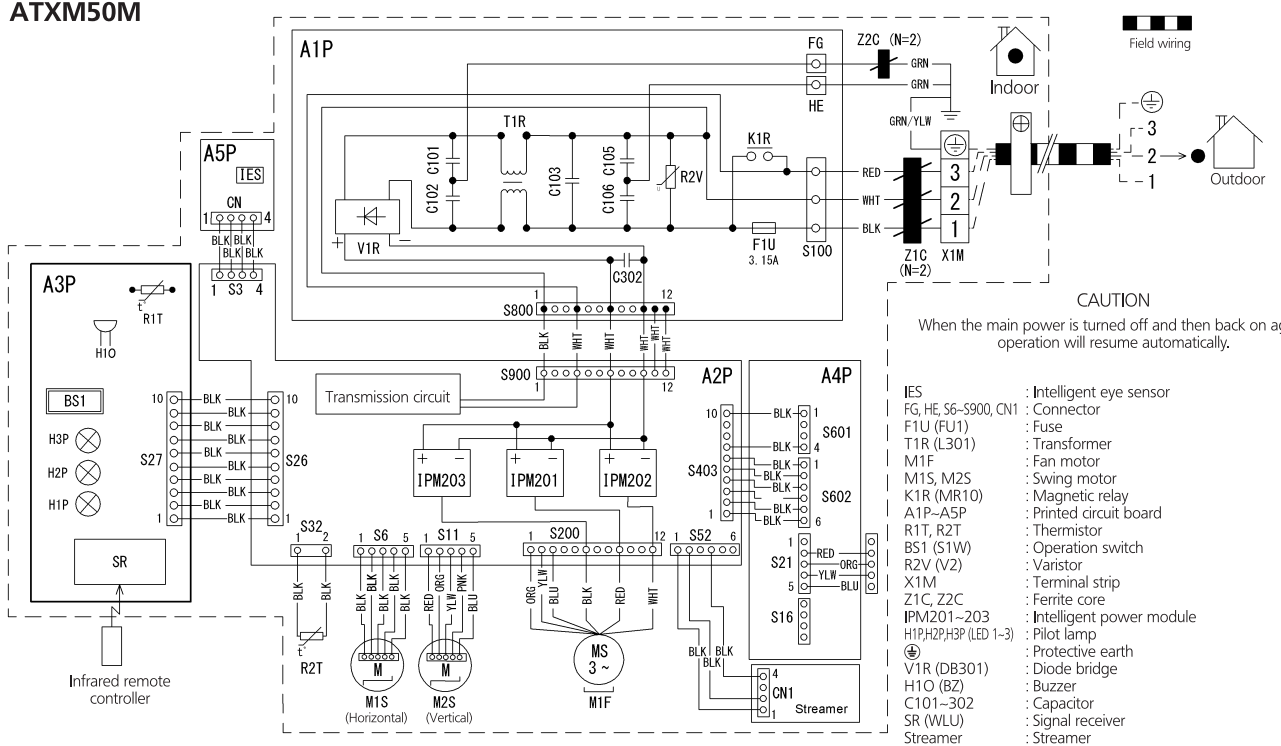

CAUTION

When the main power is turned off and then back on again, operation will resume automatically.

IES	: Intelligent eye sensor
FG, HE, S6~S900, CN1	: Connector
F1U (FU1)	: Fuse
T1R (L301)	: Transformer
M1F	: Fan motor
M1S, M2S	: Swing motor
K1R (MR10)	: Magnetic relay
A1P~A5P	: Printed circuit board
R1T, R2T	: Thermistor
BS1 (S1W)	: Operation switch
R2V (V2)	: Varistor
X1M	: Terminal strip
Z1C, Z2C	: Ferrite core
IPM201~203	: Intelligent power module
H1P,H2P,H3P (LED 1~3)	: Pilot lamp
⏚	: Protective earth
V1R (DB301)	: Diode bridge
H1O (BZ)	: Buzzer
C101~302	: Capacitor
SR (WLU)	: Signal receiver
Streamer	: Streamer

Notes:

1 Size: length 65 x width 110

2 Refer to purchasing specification AS303002, unless otherwise specified.

3 PNK: Pink, GRN: Green, YLW: Yellow, ORG: Orange, BLK: Black, RED: Red, BLU: Blue, WHT:White

3D100231A