



### Cooling mode

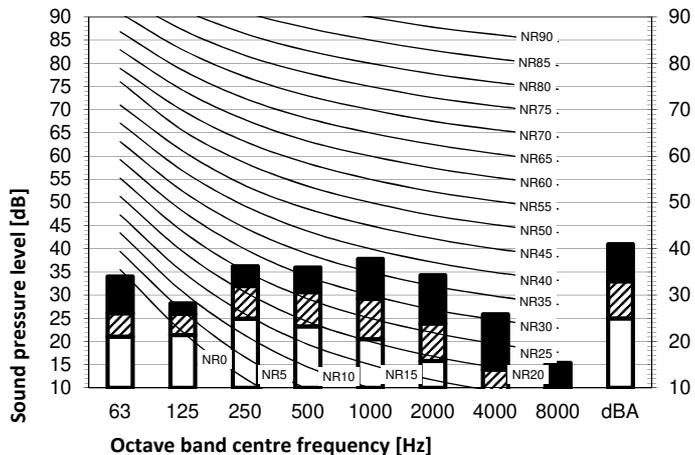

### Heating mode

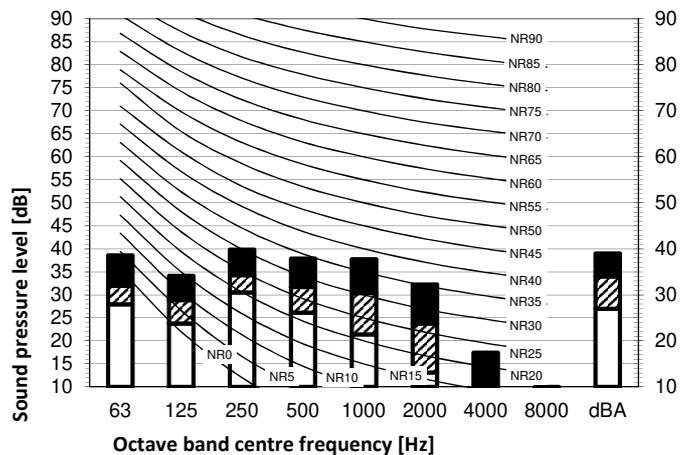

#### Legend

dBA = A-weighted sound pressure level (A scale according to IEC).


A Scale

B High-tap

C Medium-tap

D Low-tap

Location of microphone



Cooling

Total dB

| A   | B  | C  | D  |
|-----|----|----|----|
| dBA | 41 | 33 | 25 |

Heating

Total dB

| A   | B  | C  | D  |
|-----|----|----|----|
| dBA | 39 | 34 | 27 |

#### Notes

- 1 . Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
- 2 . Background noise already taken into account.
- 3 . Operating noise varies depending on operation and ambient conditions.
- 4 . The operation noise measuring method is in accordance with JISC9612.
- 5 . Measuring location: anechoic chamber