

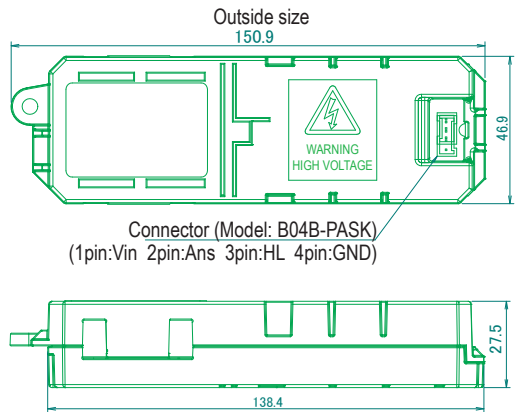


CTXM-N
FTXM-N

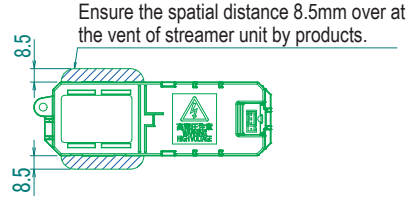

• Method of mounting

Don't blockage the vent of streamer unit.
Ensure the exit wind speed 0.2m/sec of the vent.
Ensure the spatial distance 8.5mm over at the vent of streamer unit.



Main specifications

Items		Contents
Outside	Outside size	150.9 x 46.9 x 27.5mm
	Weight	100g
Material of resin	Material	ABS
	Flame retardance	AL94-5VA
	Tracking index	Over CTI600V
Applicable laws		Electrical Appliance and Material Safety Act IEC60335-1(4th.) IEC60335-2-65(4th)
Ambient conditions	Storage temperature	-25~70°C (Non-Energization)
	Operating ambient temperature	-10~60°C (Energization)
	Operating ambient humidity	5~95%RH (Now dew deposit)
Basic specifications	Input voltage	14V±5%
	Maximum output voltage	6.5±0.5kV
	Rating output voltage	5.0±0.5kV
	Rating output current	Hi 55.5μA±10%
		Lo 10μA±10%
	ON/OFF	Inputted voltage info Vin (ON/OFF)
	Hi ↔ Lo Switching	Inputted 5V into HL (Loe tap)
	Current monitor	Yes
	Detectable over current	Yes
	Detectable low voltage	Under 3kV
Generation amount of Ozone		4.26ml/hr (Hi 14±2°C 50±10%RH)
Method of mounting		Fixing by the right and left hook
		Fixing by the screw section

