

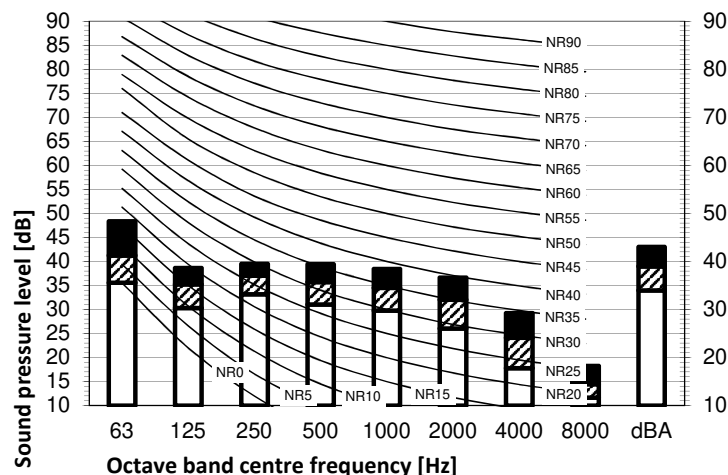


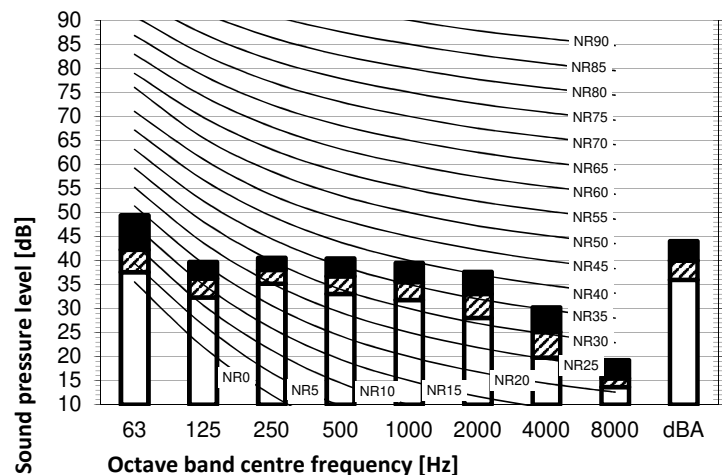

- A Scale
- B High-tap
- C Medium-tap
- D Low-tap



1. Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
2. Background noise already taken into account.
3. Operating noise varies depending on operation and ambient conditions.
4. The operation noise measuring method is in accordance with JISC9612.
5. Measuring location: anechoic chamber

Cooling		Total dB	
A	B	C	D
dBA	44	40	36

Heating		Total dB	
A	B	C	D
dBA	43	39	34