


## HEATING

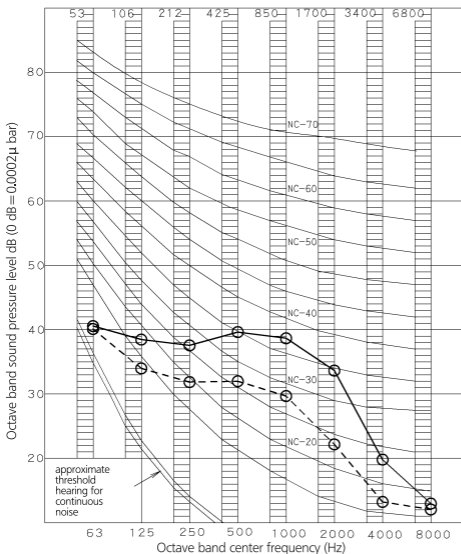

## NOTES

### 1 Overall (dB)

Scale	50Hz 230V (H) (H)	50Hz 230V (L) (L)
A	46	35

(B,G,N is already rectified)

- Measuring place: Measure in anechoic room
- Operation noise differs with operation and ambient conditions.
- Operating conditions: Power source 230V 50Hz  
JIS Standard
- Standard external static pressure  
 ○—○ 50 Hz 230V (H)  
 ○---○ 50 Hz 230V (L)  
 Heating

### 6 Location of microphone JISC9612

The operation noise measuring method is in accordance with JISC9612

