
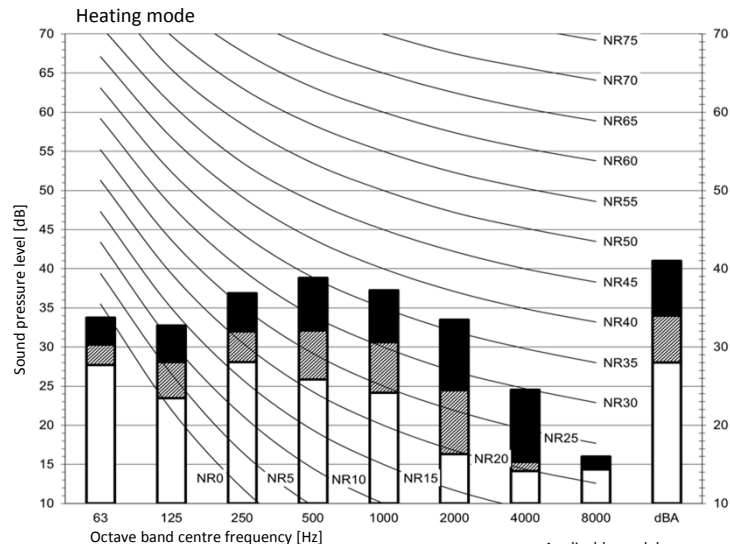


FTXG25LW/S

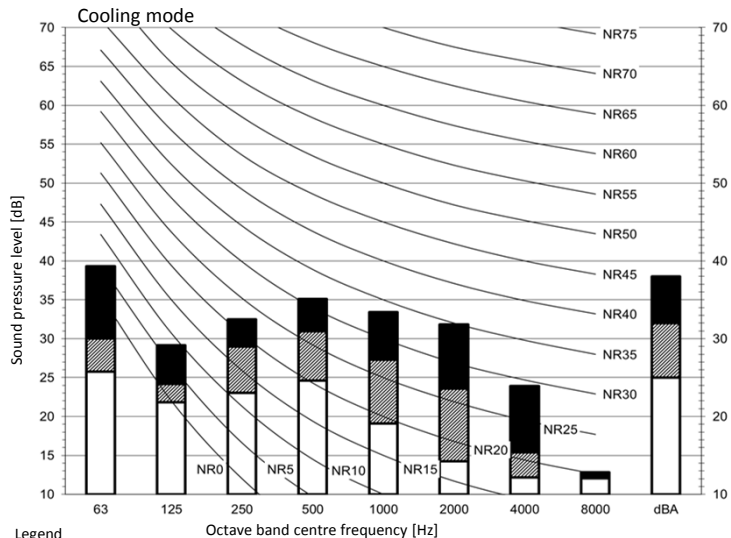


Legend

dBA = A-weighted sound pressure level (A scale according to IEC).

A Scale

- B High-tap
- Medium-tap
- C Low-tap

Location of microphone



Cooling

Total dB

A	B	C
dBA	38	25

Background noise already taken into account.

Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard

Heating

Total dB

A	B	C
dBA	41	28

Background noise already taken into account.

Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard

Applicable models
FTXG25LV1BW
FTXG25LV1BS

The operation noise measuring method is in accordance with JISC9612.

Measuring location: anechoic chamber

Notes

Operating noise varies depending on operation and ambient conditions.