


Cooling

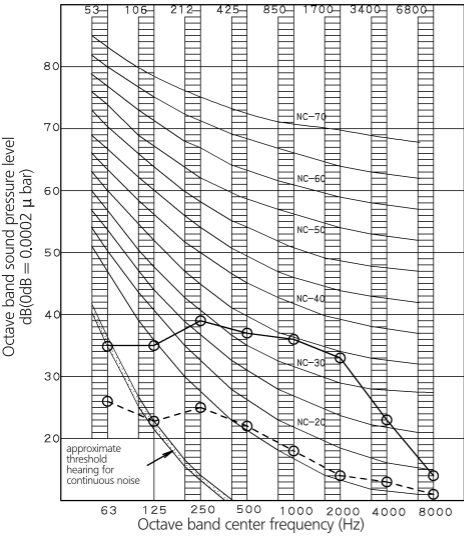

NOTES

- 1 Overall (dB)  
(B,G,N is already rectified)
- 2 Measuring place: Measure in anechoic room
- 3 Operation noise differs with operation and ambient conditions.
- 4 Operating conditions: Power source 230V 50Hz
- 5 Location of microphone  
JISC9612  
The operation noise measuring method is in accordance with JISC9612
- 6 Standard external static pressure  
○—○ 50 Hz 230V (H)  
○---○ 50 Hz 230V (L)

Scale	50Hz 230V (H)	50Hz 230V (L)
A	40	24

