


HEATING

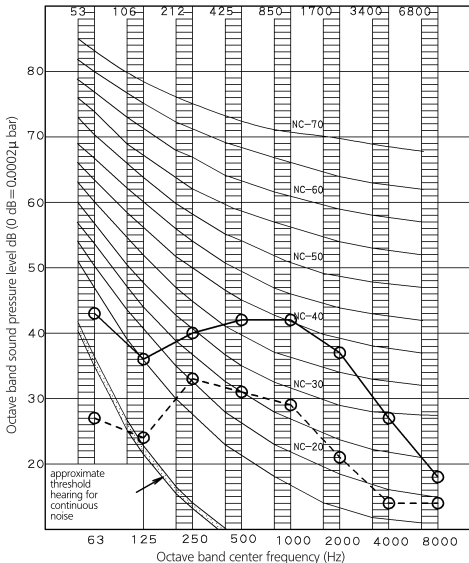

NOTES

1 Overall (dB)

Scale	50Hz 220-240V (H)	50Hz 220-240V (L)
A	45	33

(B,G,N is already rectified)

- Measuring place: Measure in anechoic room
- Operation noise differs with operation and ambient conditions.
- Operating conditions: Power source 220-240V 50Hz
- Standard external static pressure
- 50 Hz 220-240V (H)
 ○---○ 50 Hz 220-240V (L)
 Heating
- Location of microphone

JISC9612

The operation noise measuring method is in accordance with JISC9612

