FVXG50K

Cooling

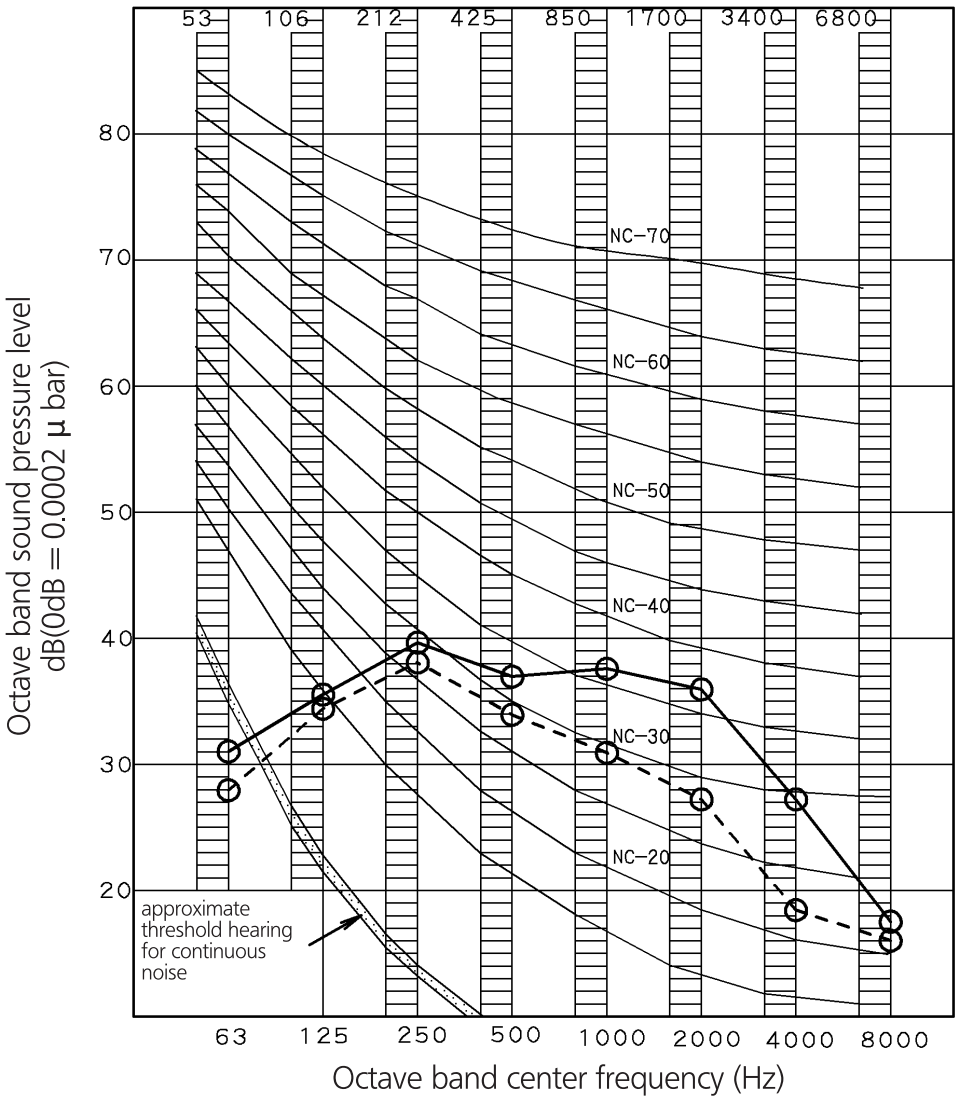

Heating

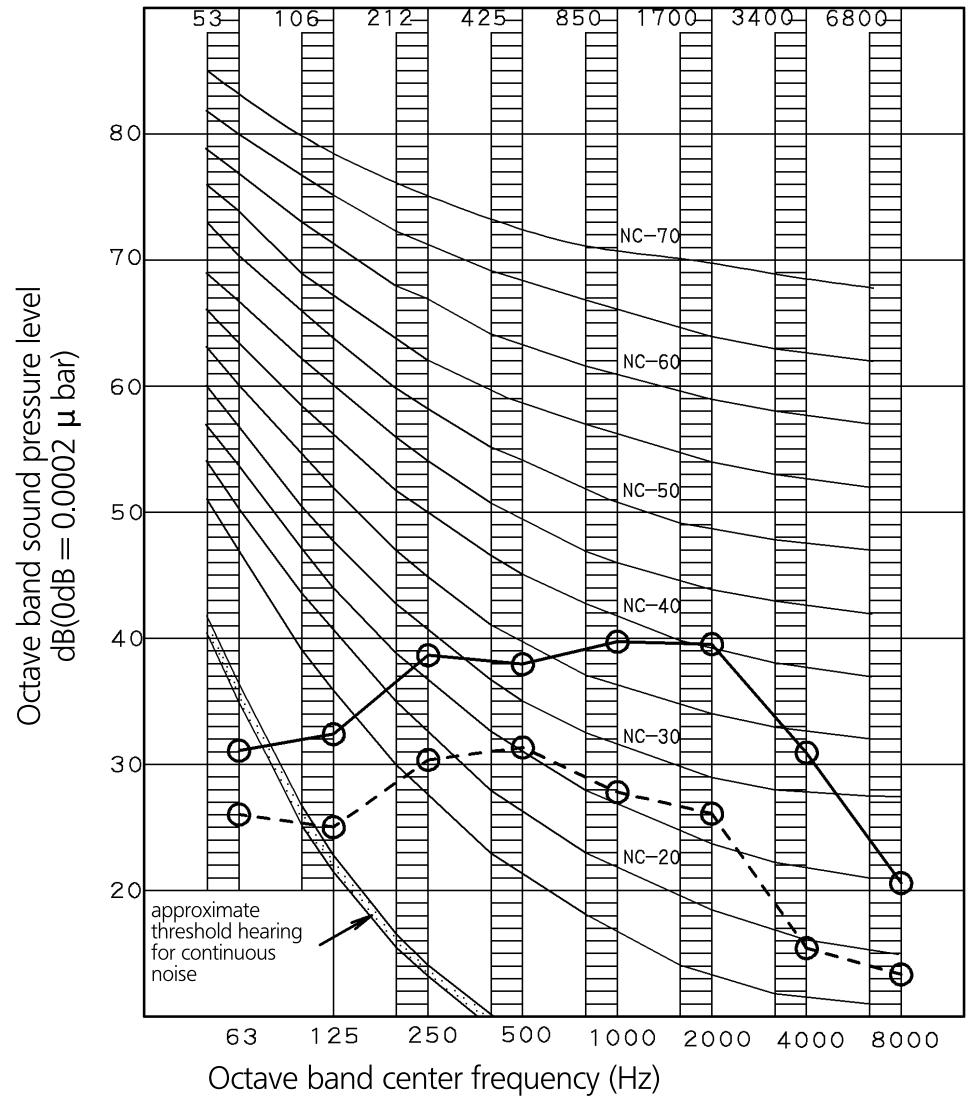

3D071602

Overall (dB)

Scale	50Hz 220-240V (H)	50Hz 220-240V (L)
A	44	36

(B,G,N is already rectified)

Measuring place

Measure in anechoic room

NOTE: Operation noise differs with operation and ambient conditions.

Operating conditions

Power source 220-240V 50Hz

External static pressure

○——○ 50Hz 220-240V (H)

○- - - -○ 50Hz 220-240V (L)

Cooling

Location of microphone

The operation noise measuring method is in accordance with JISC9612



Overall (dB)

Scale	50Hz 220-240V (H)	50Hz 220-240V (L)
A	46	34

(B,G,N is already rectified)

Measuring place

Measure in anechoic room

Operating conditions

Power source 220-240V 50Hz

External static pressure

○——○ 50Hz 220-240V (H)

○- - - -○ 50Hz 220-240V (L)

Heating

Location of microphone

The operation noise measuring method is in accordance with JISC9612