


COOLING

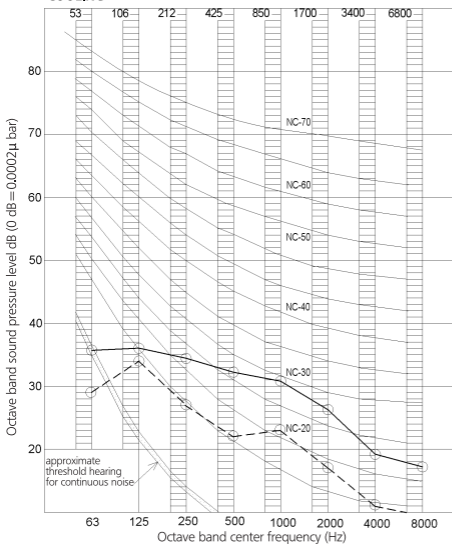

NOTES

1 Overall (dB)

Scale	220-240V/50Hz 220-230V/60Hz (H)	220-240V/50Hz 220-230V/60Hz (L)
A	35	27

(B,G,N is already rectified)

- Measuring place: Measure in anechoic room
- Operation noise differs with operation and ambient conditions.
- The operating sound is based on the rear side suction inlet, and the external static pressure 40Pa.
- Operating conditions:
Power source 220-240V 50Hz/220-230V 60Hz
- Standard external static pressure
JIS
○—○ (H) 220-240V 50Hz/220-230V 60Hz
○---○ (L) 220-240V 50Hz/220-230V 60Hz
- Location of microphone:

