


## HEATING

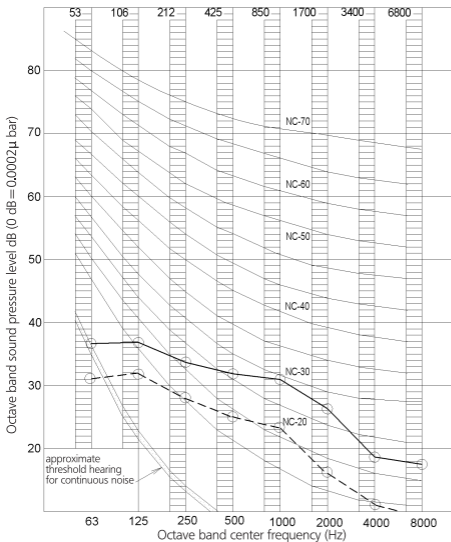

## NOTES

### 1 Overall (dB)

Scale	220-240V/50Hz 220-230V/60Hz (H)	220-240V/50Hz 220-230V/60Hz (L)
A	35	27

(B,G,N is already rectified)

- 2 Measuring place: Measure in anechoic room
- 3 Operation noise differs with operation and ambient conditions.
- 4 The operating sound is based on the rear side suction inlet, and the external static pressure 40Pa.
- 5 Operating conditions:  
Power source 220-240V 50Hz/220-230V 60Hz
- 6 Standard external static pressure

JIS

○—○ (H) 220-240V 50Hz/220-230V 60Hz  
○---○ (L) 220-240V 50Hz/220-230V 60Hz

### 7 Location of microphone:

