


HEATING

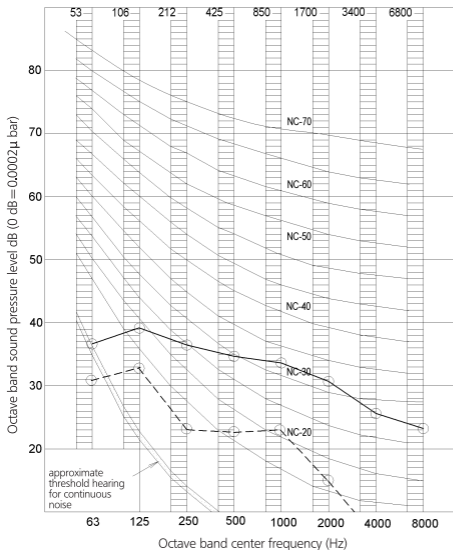

NOTES

1 Overall (dB)

Scale	50Hz/230V 60Hz/220V (H)	50Hz/230V 60Hz/220V (L)
A	38	30

(B,G,N is already rectified)

- Measuring place: Measure in anechoic room
- Operation noise differs with operation and ambient conditions.
- The operating sound is based on the rear side suction inlet, and the external static pressure 40Pa.
- Operating conditions:
Power source 230V 50Hz/220V 60Hz
- Standard external static pressure

JIS
 ○—○ (H) 230V 50Hz/220V 60Hz
 ○---○ (L) 230V 50Hz/220V 60Hz

7 Location of microphone:

